FOME S.R.L.

CATALOG 14-2021

1971 - 2021

MADE IN ITALY

MANIFOLDS & ACCESSORIES
FOR PUMPS SYSTEMS STAINLESS STEEL AISI304

Via cal Resana 15/A 31028 Tezze di Piave (TV) Italy
Tel. 0039 0438 28446   Fax. 0039 0438 28760
info@fome.it www.fome.it

MADE IN ITALY

1971 FOME nasce dall'idea di due giovani imprenditori veneti, Bruno **Fo**rte e Attilio **Me**neghin.
Il nome dell'azienda è un acronimo dei cognomi dei fondatori. L'azienda inizia la propria attività in una vecchia stalla a Tezze di Piave (TV). L'attività principale è data da lavorazioni meccaniche di ripresa per conto terzi.

1980 Negli anni ottanta l'azienda inizia la propria produzione di articoli per belle arti in metallo, partecipando fin dal 1978 a fiere internazionali inizia l'espansione delle vendite nel mercato americano. Viene costruito il primo stabilimento produttivo nell'area che tuttora è occupata dall'azienda.

1990 Negli anni novanta l'azienda conosce un periodo di forte espansione, diversifica la propria produzione nel settore nautico e nella costruzione di componenti per impianti di aspirazione. Vengono create nuove aziende, acquisiti nuovi mercati e nuovi clienti. Vengono ulteriormente ampliati gli stabilimenti.

2000 Negli anni duemila i due soci fondatori decidono di dividere le aziende e la FOME rimane della famiglia Meneghin. L'azienda inizia la propria produzione di materiale per il settore del movimento acqua, focalizzandosi sulla produzione di collettori per gruppi di pompaggio in acciaio e acciaio inox.

2010 Negli anni del secondo decennio del nuovo millennio, nonostante la crisi globale, l'azienda investe in tecnologia e riesce ad aumentare il fatturato e il numero di addetti. Viene ampliato lo stabilimento produttivo ed entra nel mercato dei componenti per impianti di riscaldamento.

2021 L'azienda oggi si sviluppa su una superficie coperta di circa 7000m², conta una cinquantina di dipendenti e continua ad avere forte propensione per l'export. I continui investimenti in tecnologia permettono di trovare sempre nuovi metodi di produzione per rimanere nel mercato globale garantendo al cliente qualità e servizio con lo stesso entusiasmo di cinquant'anni fa.

1971 FOME was born from the idea of two young Venetian entrepreneurs, Bruno **Fo**rte and Attilio **Me**neghin.
The company name is an acronym of the founders' surnames. The company began its business in an old stable in Tezze di Piave (TV) Italy. The main activity is given by mechanical work for third parties.

1980 In the eighties the company began its production in fine arts' articles in metal. The expansion of sales in The American's market helps the growth of the company. FOME joining international fairs since 1978.
The first production plant was built in the area that still occupies the company.

1990 In the nineties the company experienced a period of strong expansion, diversifying its production in the boat field and in the construction of components for extraction systems. New companies are created, new markets and new customers are acquired. The factories are further expanded.

2000 In the 2000s the two founding partners decide to divide the companies and FOME remains of the Meneghin family. The company begins its production of material for the water movement sector, focusing on the production of manifolds for pumping groups, in steel and stainless steel.

2010 In the years of the second decade of the new millennium, despite the global crisis, the company invests in New technologies and manages to increase turnover and the number of employees.
The production plant is expanded, company start in the market of components for heating systems.

2021 The company today is spread over a covered area of 7000 m², employs about fifty people. A strong propensity for exports remain in the DNA of the company. Continuous investments in technology allow us to always find new one's production methods to stay in the global market by guaranteeing the customer quality and service with the same enthusiasm of fifty years ago.

PRODUCTS INDEX

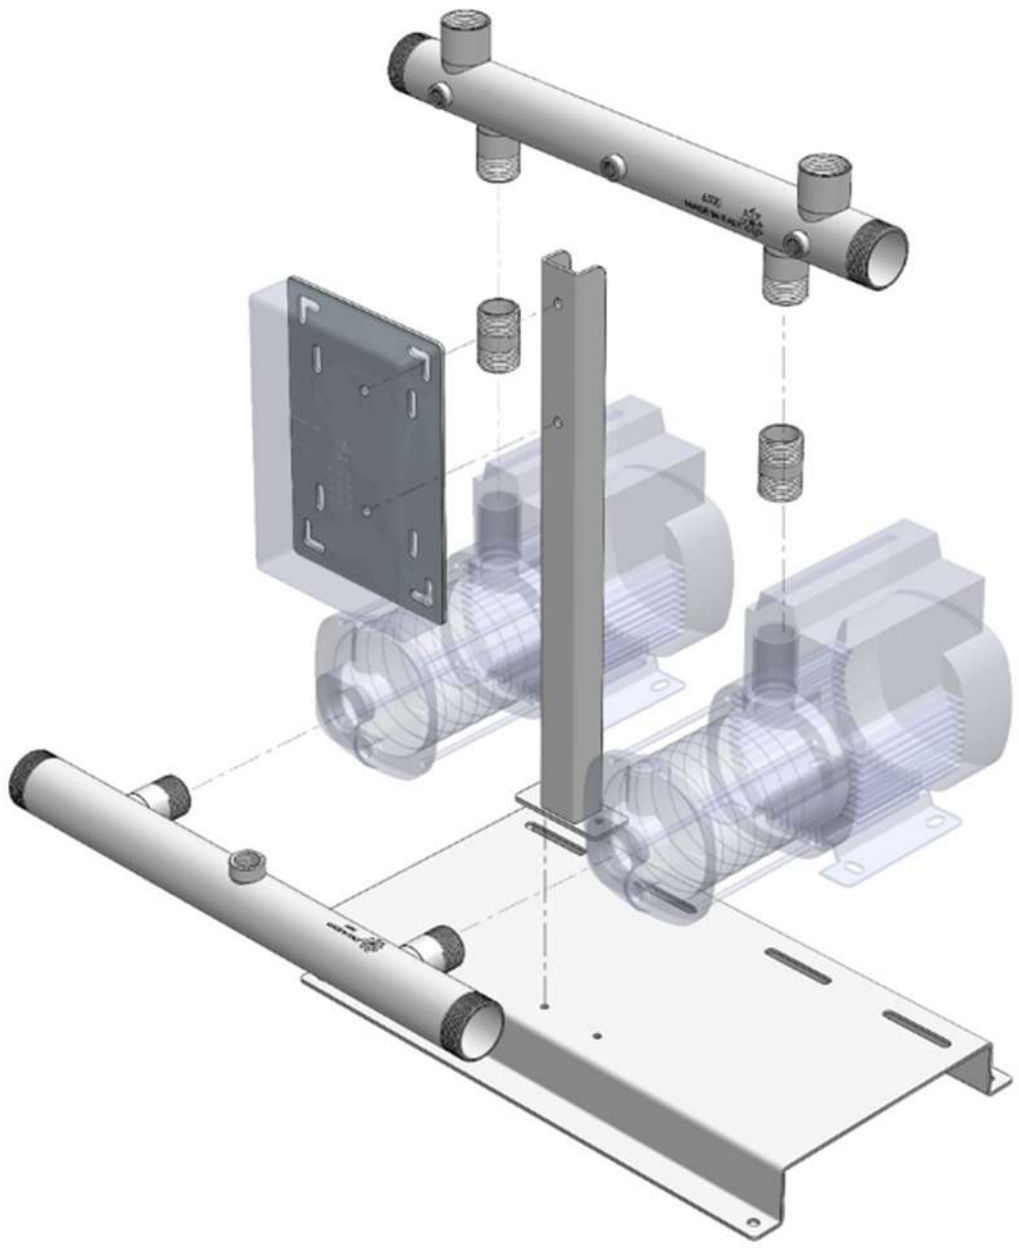

Management System
ISO 9001:2015
TÜVRheinland
CERTIFIED
www.tuv.com
ID 9105010432

DELIVERY SIDE MANIFOLDS FOR 2 PUMPS – AISI 304L- PN16

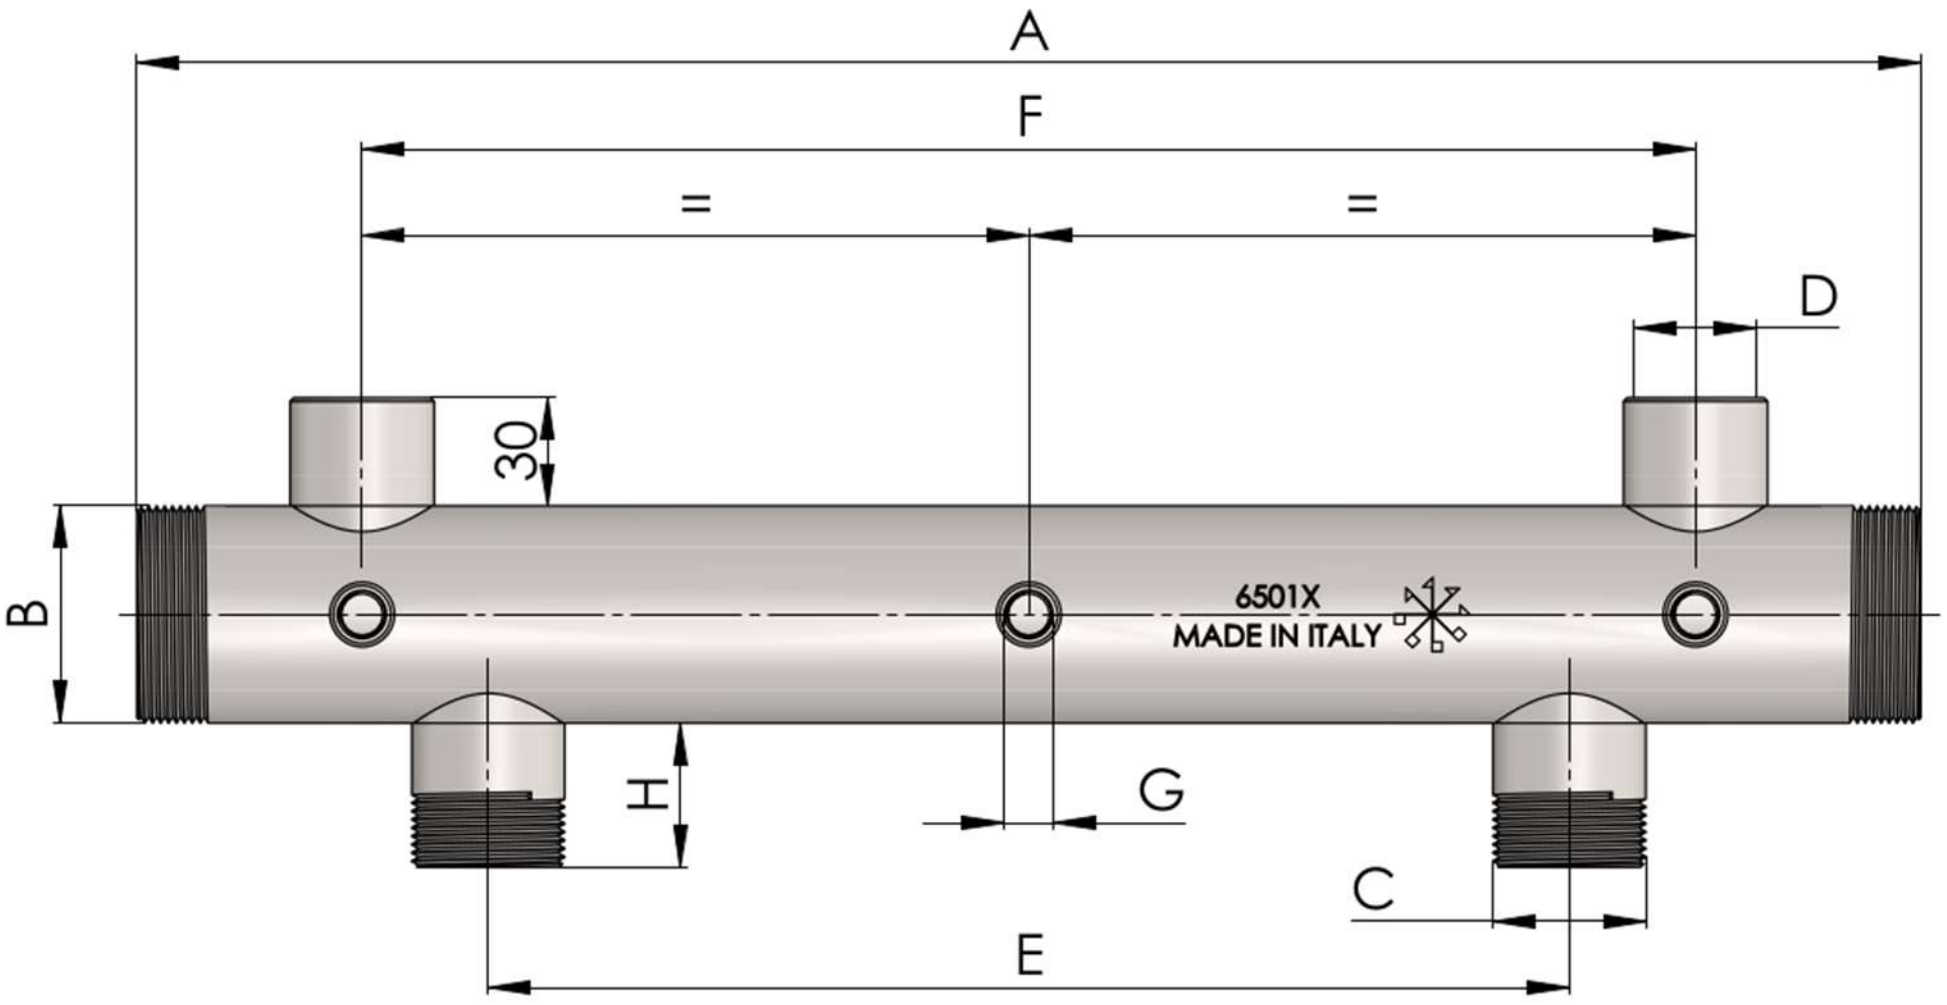

code	A (mm)	B (Ø)	C (G)	D (G)	E (mm)	F (mm)	G (G)	H (mm)	Weight (kg)
6500X	500	1”1/2	1”	1”	300	370	1/4”	40	1.90
6503X	500	2”	1”	1”	300	370	1/4”	40	2.30
6501X	500	2”	1”1/4	1”	300	370	1/4”	40	2.40
6505X	500	2”	1”1/2	1”	300	370	1/4”	40	2.40
6502X	500	2”1/2	1”1/4	1”	300	370	1/4”	40	2.90
6506X	500	2”1/2	1”1/2	1”	300	370	1/4”	60	3.00
6515X	500	3”	2”	1”	300	370	1/4”	60	3.50
6510X	700	2”	1”1/4	1”	360	370	1/4”	40	3.20
6511X	700	2”	1”1/2	1”	360	390	1/4”	40	3.20
6513X	700	2”1/2	1”1/4	1”	360	390	1/4”	40	4.00
6512X	700	2”1/2	1”1/2	1”	360	390	1/4”	60	4.20
6504X	700	3”	2”	1”	360	390	1/4”	60	4.90
6514X	700	DN100	3”	1”	360	390	1/4”	60	15.20

A	Length of manifold in mm
B	Dimension of main pipe, male threaded both sides.
C	Pumps’ connection, male threaded.
D	Pressure vassels’ connection, female sleeve.
E	Distance between pumps.
F	Distance between pressure vassels.
G	Female sleeves for instruments.

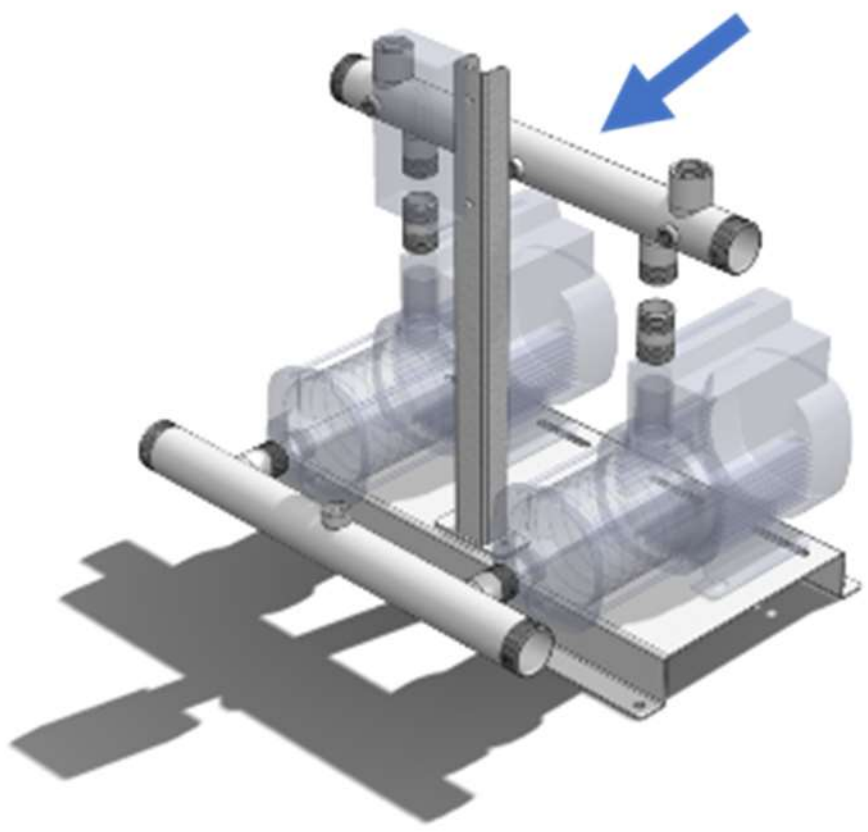

MATERIAL	AISI 304L (1.4306)
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	ELECTROCHEMICAL POLISHING DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

SUCTION SIDE MANIFOLDS FOR 2 PUMPS - AISI 304L - PN16

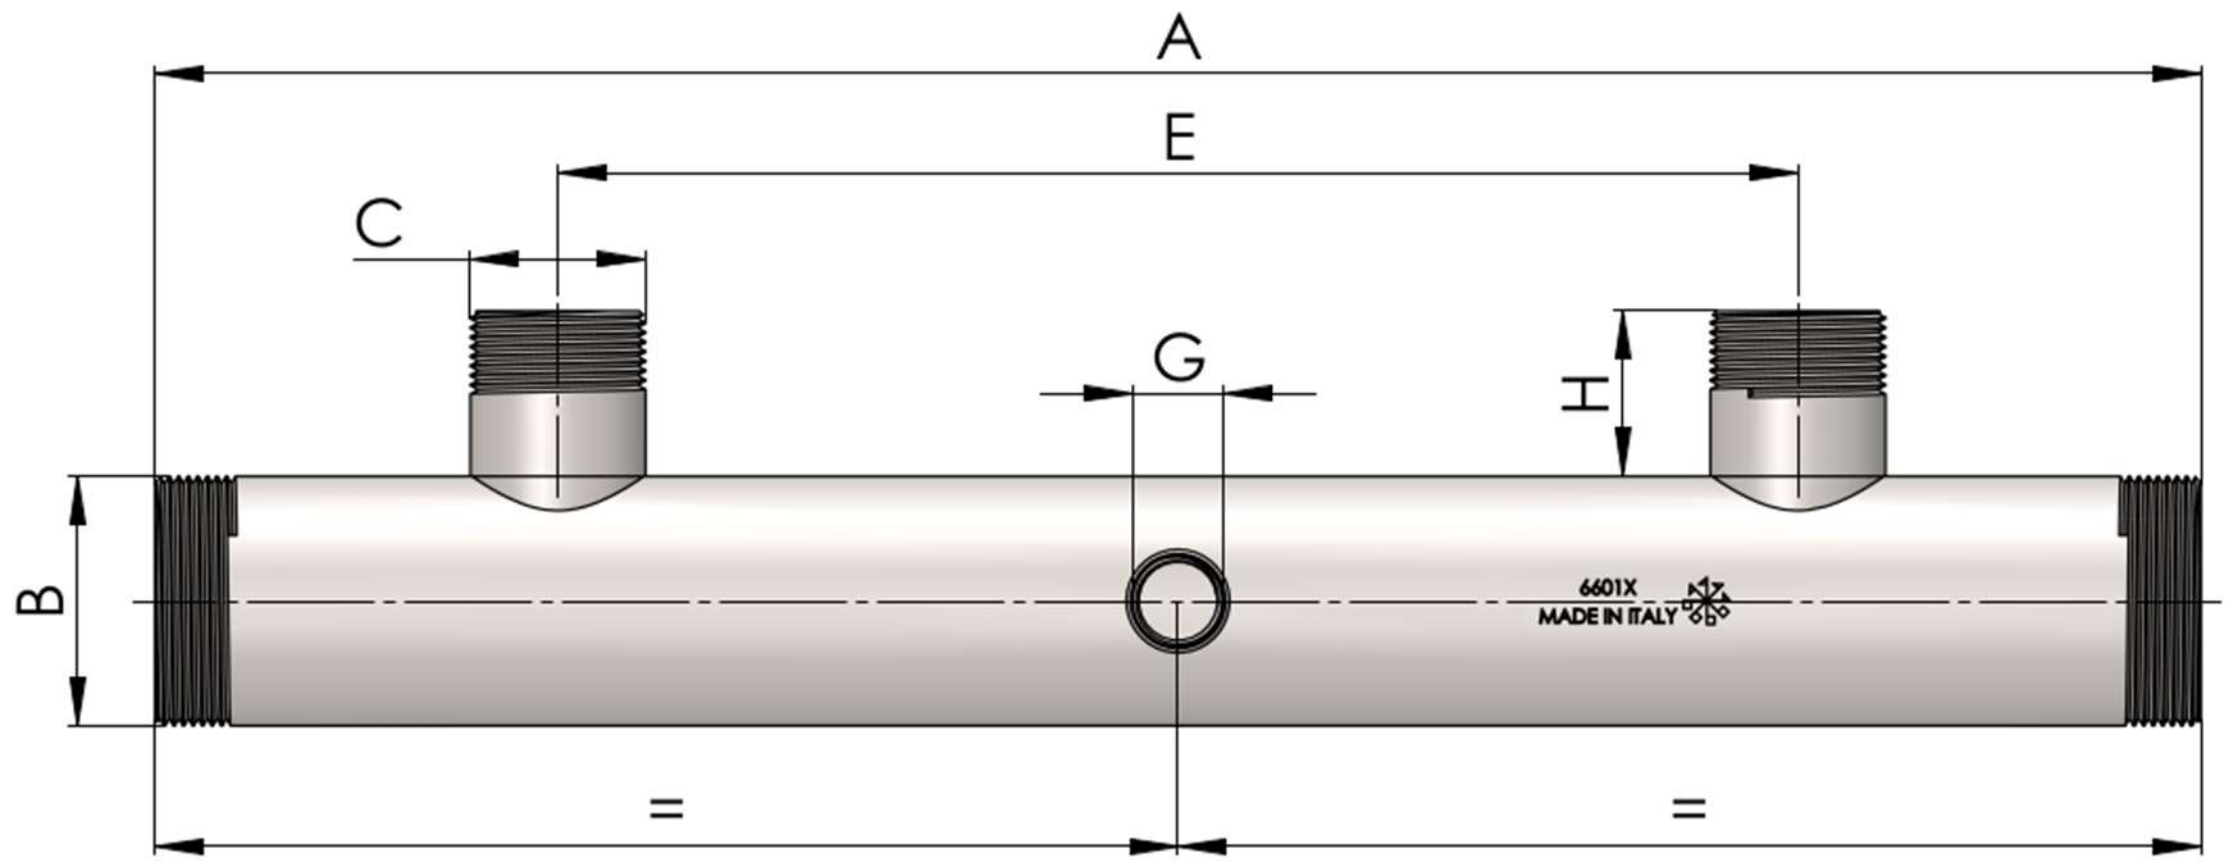

code	A (mm)	B (Ø)	C (G)	E (mm)	G (G)	H (mm)	Weight (kg)
6600X	500	1”1/2	1”	300	½”	40	1.80
6603X	500	2”	1”	300	½”	40	2.10
6601X	500	2”	1”1/4	300	½”	40	2.20
6605X	500	2”	1”1/2	300	½”	40	2.30
6609X	500	2”1/2	1”1/4	300	½”	40	2.80
6602X	500	2”1/2	1”1/2	300	½”	40	2.80
6604X	500	3”	2”	300	½”	60	3.40
6606X	700	2”	1”1/4	360	½”	40	3.00
6611X	700	2”	1”1/2	360	½”	40	3.10
6613X	700	2”1/2	1”1/4	360	½”	40	3.90
6612X	700	2”1/2	1”1/2	360	½”	40	3.90
6610X	700	3”	2”	360	½”	60	5.00
6614X	700	DN100	3”	360	½”	60	15.10

A	Length of manifold in mm
B	Dimension of main pipe, male threaded both sides.
C	Pumps’ connection, male threaded.
E	Distance between pumps.
G	Female sleeves for instruments.

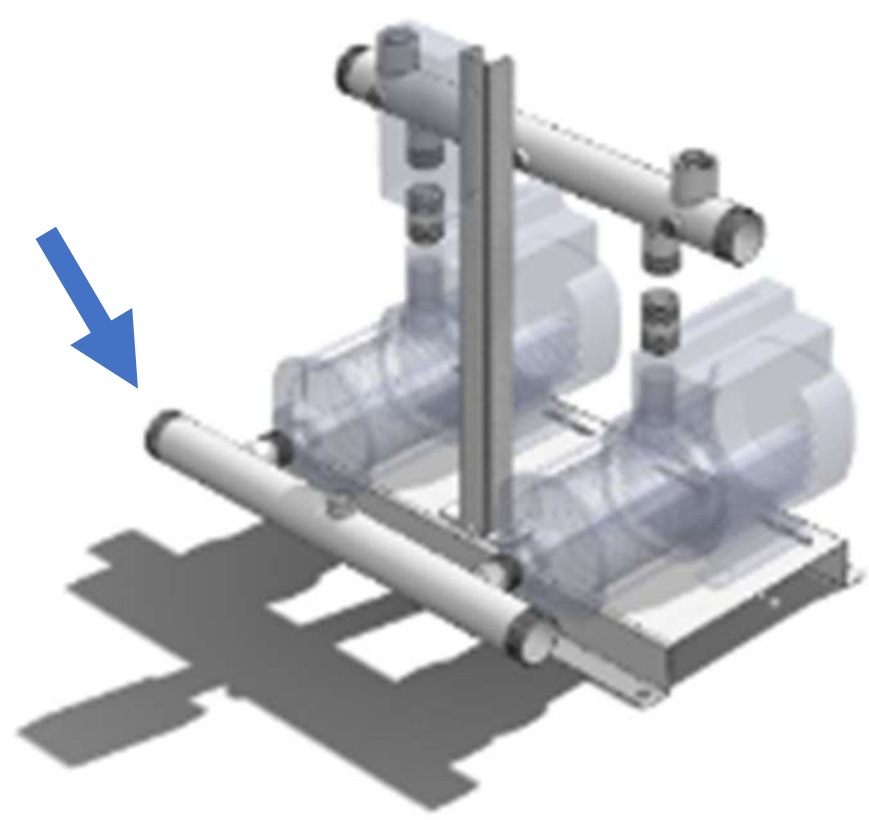

MATERIAL	AISI 304L (1.4306)
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	ELECTROCHEMICAL POLISHING DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

DELIVERY SIDE MANIFOLDS FOR 3 PUMPS - AISI 304L - PN16

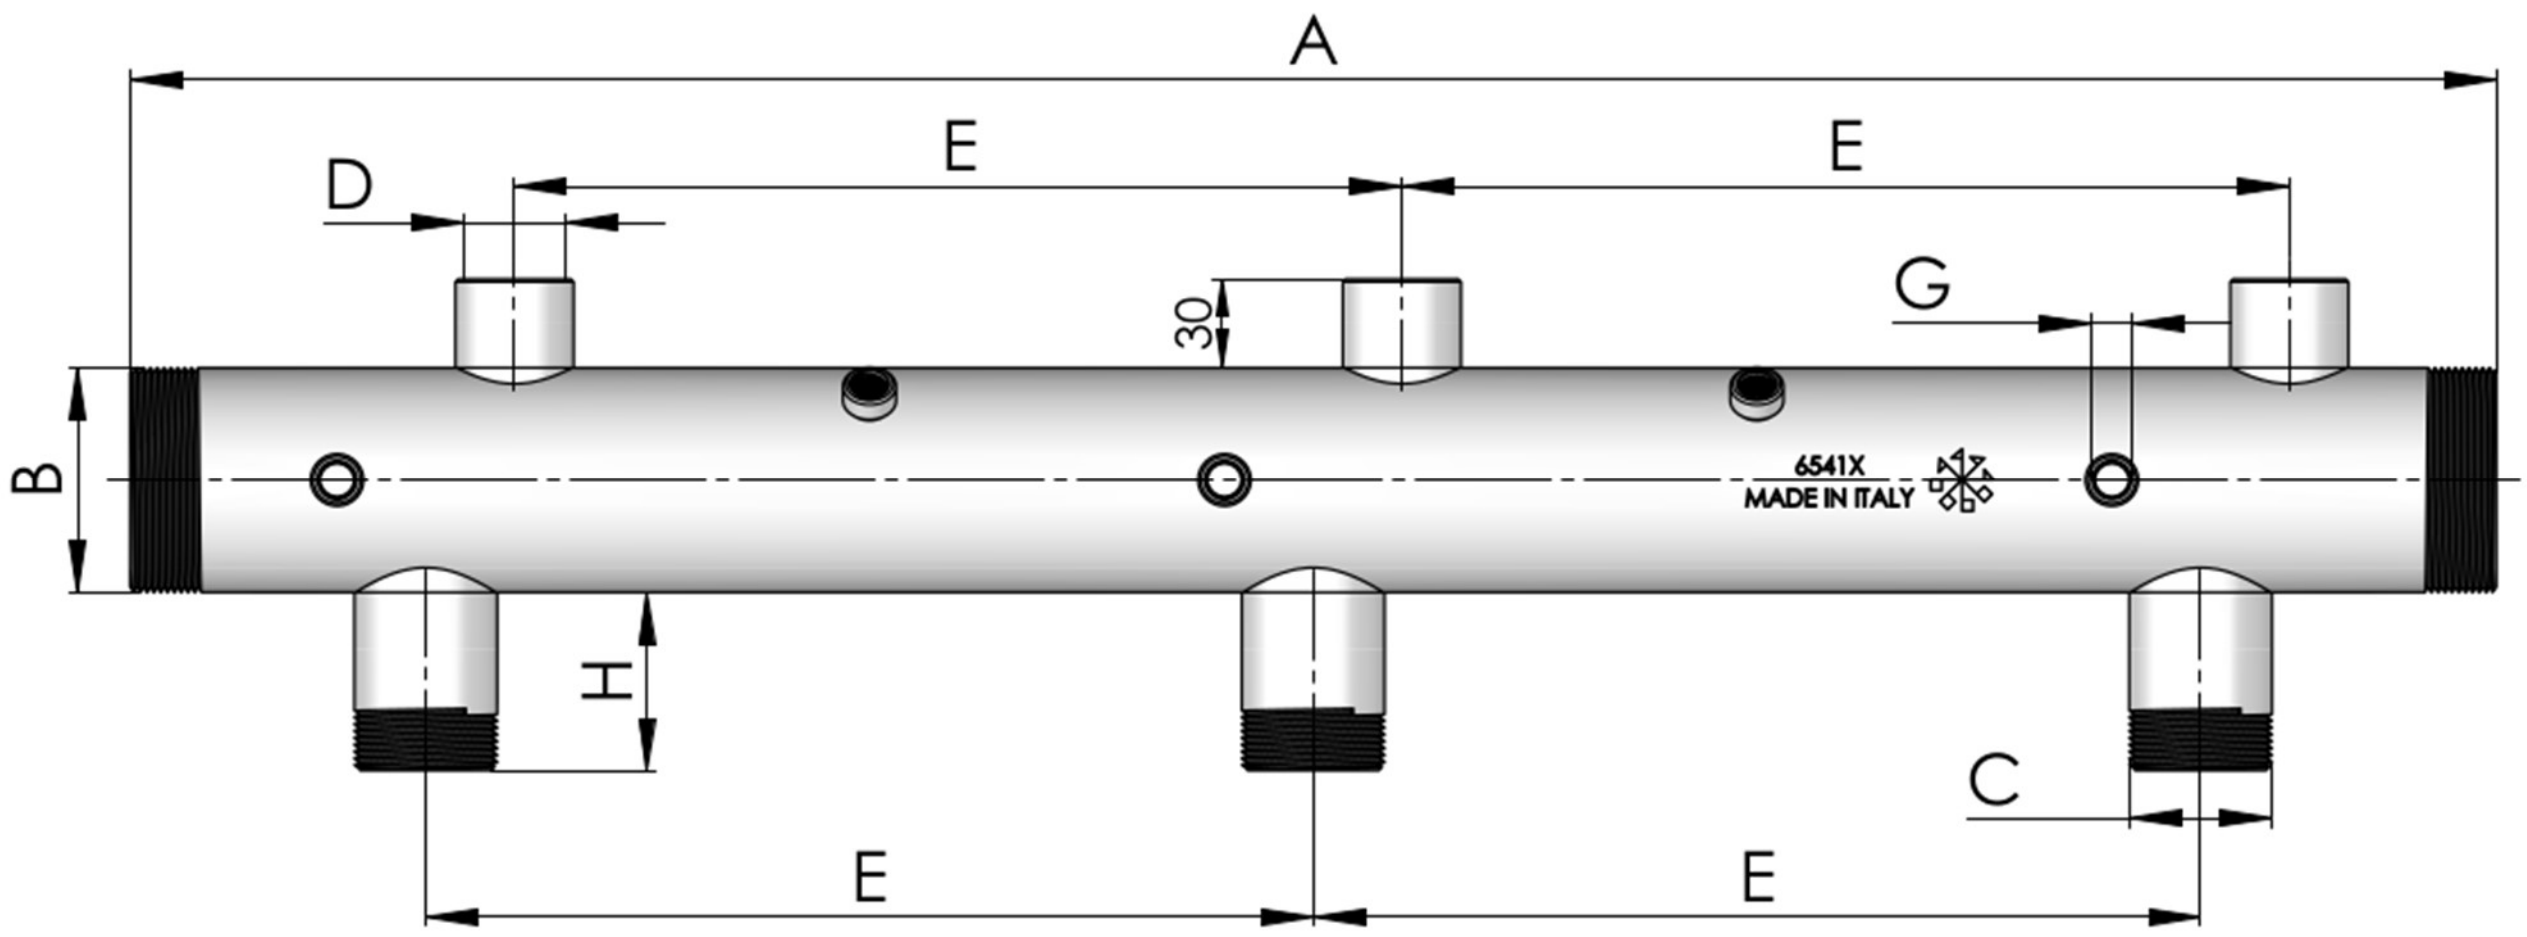

code	A (mm)	B (Ø)	C (G)	D (G)	E (mm)	F (G)	H (mm)	Weight (kg)
6542X	800	2”	1”	1”	300	¼”	40	3.80
6540X	800	2”	1”1/4	1”	300	¼”	40	3.90
6543X	800	2”1/2	1”1/4	1”	300	¼”	40	4.80
6541X	800	2”1/2	1”1/2	1”	300	¼”	60	5.00
6544X	800	3”	2”	1”	300	¼”	60	6.20
6545X	800	DN100	3”	1”	300	¼”	90	17.50
6546X	1000	2”1/2	1”1/2	1”	360	¼”	60	6.00
6547X	1000	3”	2”	1”	360	¼”	60	7.00
6548X	1000	DN100	3”	1”	360	¼”	60	15.00

A	Length of manifold in mm
B	Dimension of main pipe, male threaded both sides.
C	Distance between pumps.
D	Pumps’ connection, male threaded.
E	Pressure vessels’ connection, female sleeve.
F	Female sleeves for instruments.

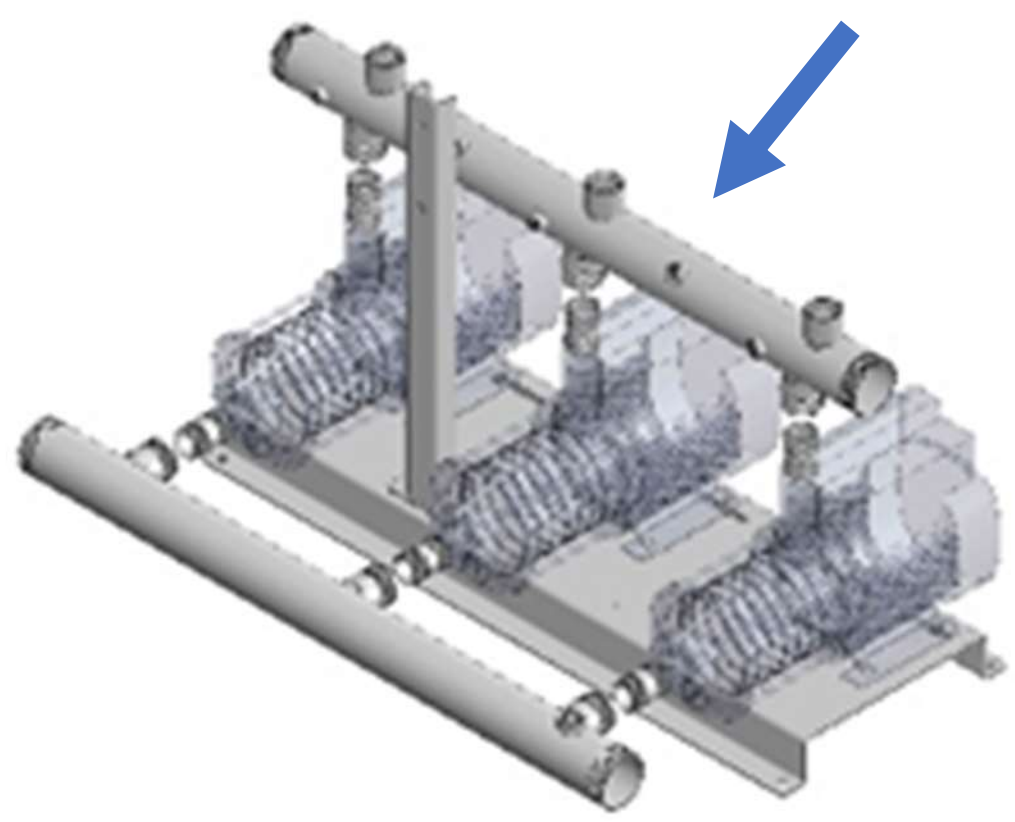

MATERIAL	AISI 304L (1.4306)
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	ELECTROCHEMICAL POLISHING DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

SUCTION SIDE MANIFOLDS FOR 3 PUMPS - AISI 304L - PN16

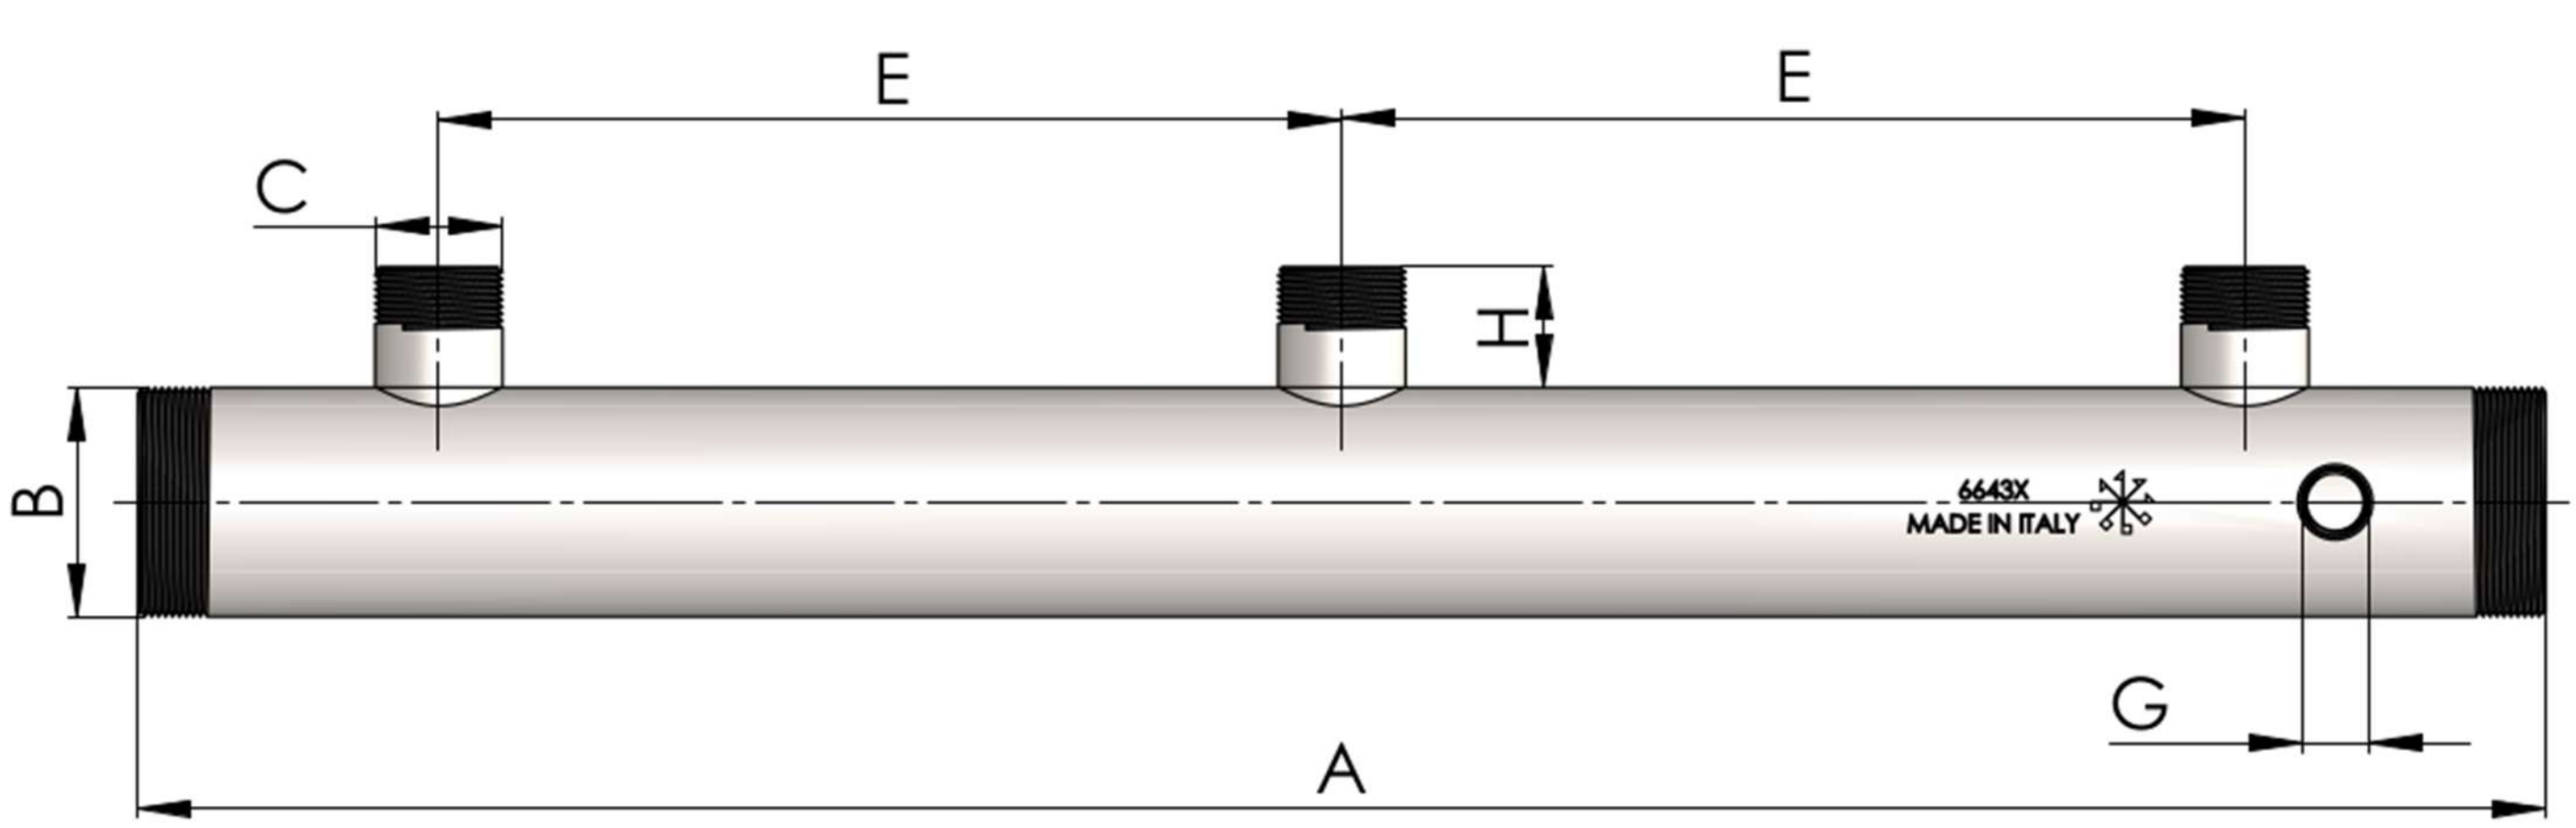

code	A (mm)	B (Ø)	C (G)	E (mm)	G (G)	H (mm)	Weight (kg)
6642X	800	2”	1”	300	½”	40	3.50
6640X	800	2”	1”1/4	300	½”	40	3.60
6643X	800	2”1/2	1”1/4	300	½”	40	4.50
6641X	800	2”1/2	1”1/2	300	½”	60	4.70
6644X	800	3”	2”	300	½”	60	5.90
6645X	800	DN100	3”	300	½”	90	17.10
6646X	1000	2”1/2	1”1/2	360	½”	40	5.50
6647X	1000	3”	2”	360	½”	40	6.60
6648X	1000	DN100	3”	360	½”	60	14.00

A	Length of manifold in mm
B	Dimension of main pipe, male threaded both sides.
C	Distance between pumps.
D	Pumps’ connection, male threaded.
E	Female sleeves for instruments.

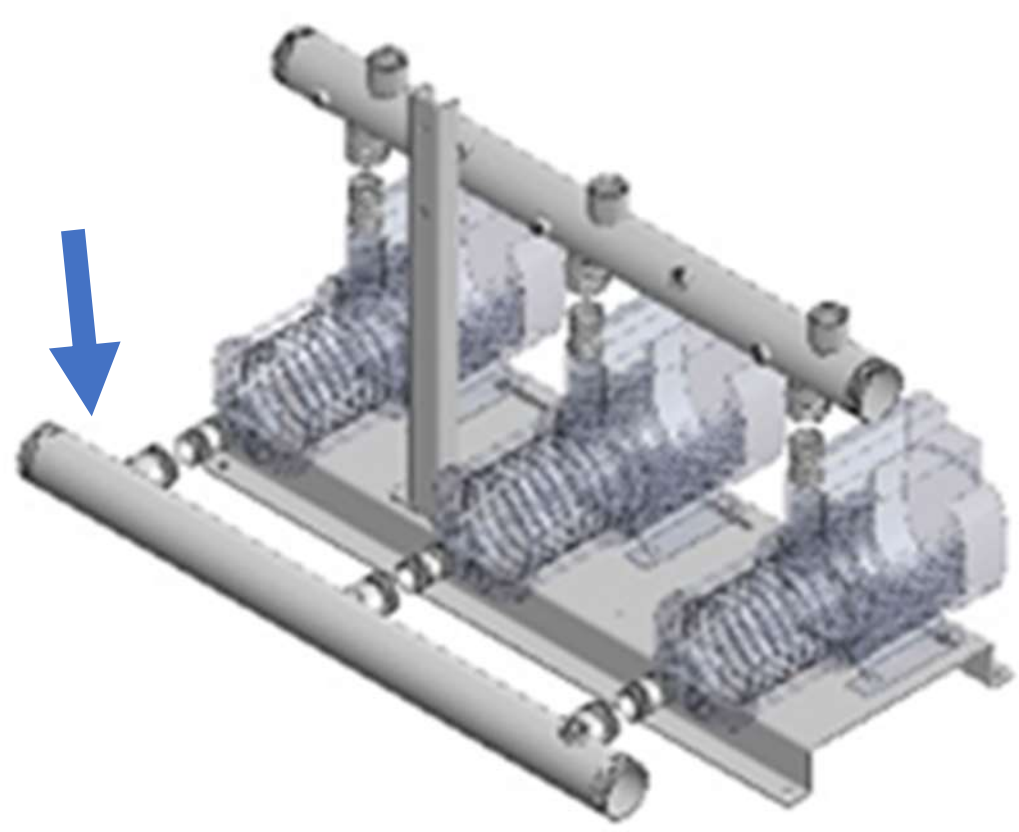

MATERIAL	AISI 304L (1.4306)
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	ELECTROCHEMICAL POLISHING DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

VERTICAL MANIFOLDS FOR 2 PUMPS - AISI 304L - PN16

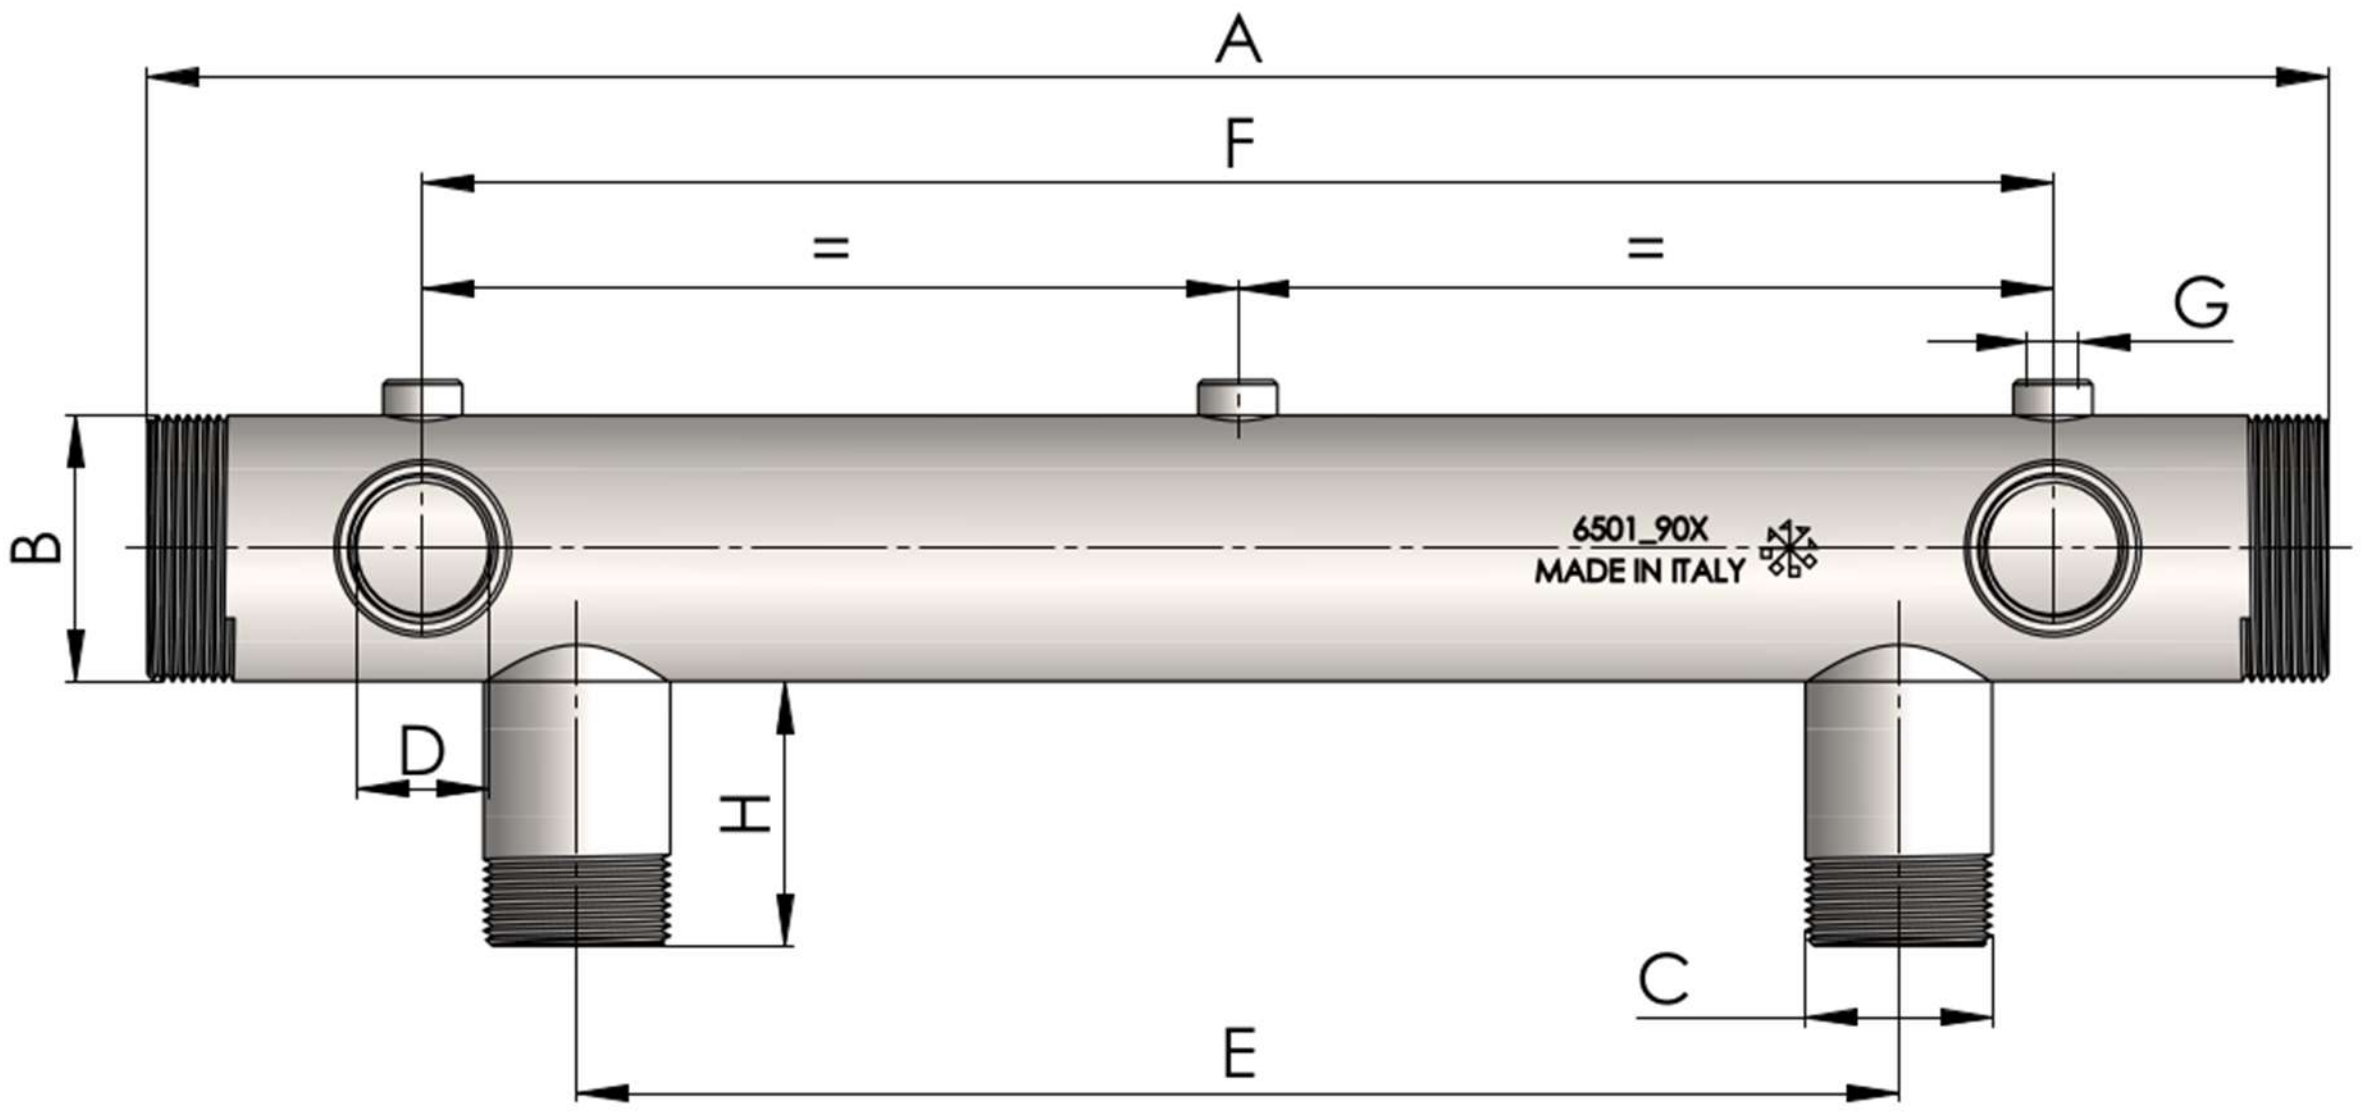

code	A (mm)	B (Ø)	C (G)	D (G)	E (mm)	F (mm)	G (G)	H (mm)	Weight (kg)
6500_90X	500	1”1/2	1”	1”	300	370	1/4”	60	1.90
6503_90X	500	2”	1”	1”	300	370	1/4”	60	2.30
6501_90X	500	2”	1”1/4	1”	300	370	1/4”	60	2.40
6505_90X	500	2”	1”1/2	1”	300	370	1/4”	60	2.40
6502_90X	500	2”1/2	1”1/4	1”	300	370	1/4”	60	2.90
6506_90X	500	2”1/2	1”1/2	1”	300	370	1/4”	60	3.00
6510_90X	700	2”	1”1/4	1”	360	370	1/4”	60	3.20
6511_90X	700	2”	1”1/2	1”	360	390	1/4”	60	3.20
6513_90X	700	2”1/2	1”1/4	1”	360	390	1/4”	60	4.00
6512_90X	700	3”	1”1/2	1”	360	390	1/4”	60	4.20
6504_90X	700	3”	2”	1”	360	390	1/4”	60	4.90

A	Length of manifold in mm
B	Dimension of main pipe, male threaded both sides.
C	Pumps’ connection, male threaded.
D	Pressure vessels’ connection, female sleeve.
E	Distance between pumps.
F	Distance between pressure vessels.
G	Female sleeves for instruments.

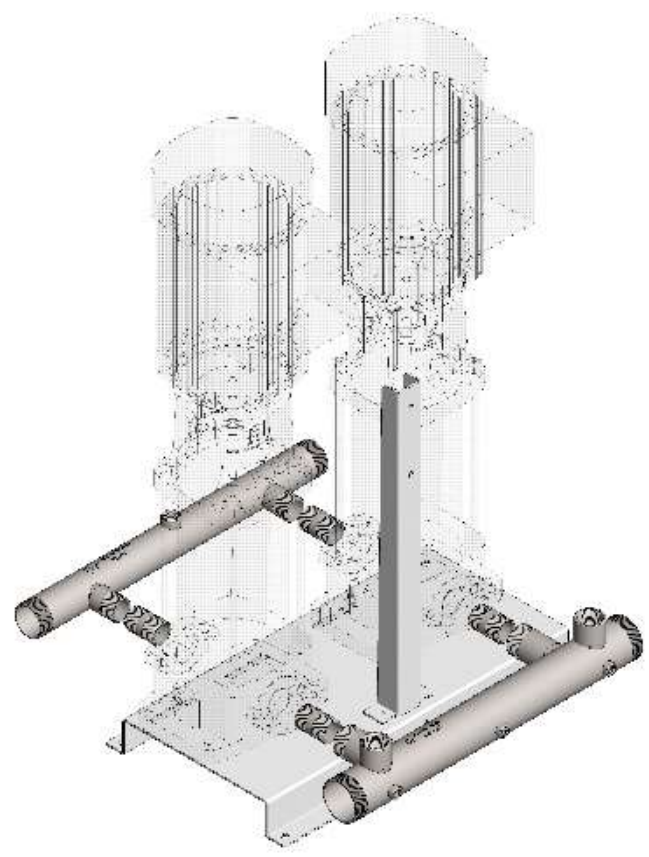

MATERIAL	AISI 304L (1.4306)
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	ELECTROCHEMICAL POLISHING DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

VERTICAL MANIFOLDS FOR 3 PUMPS - AISI 304L - PN16

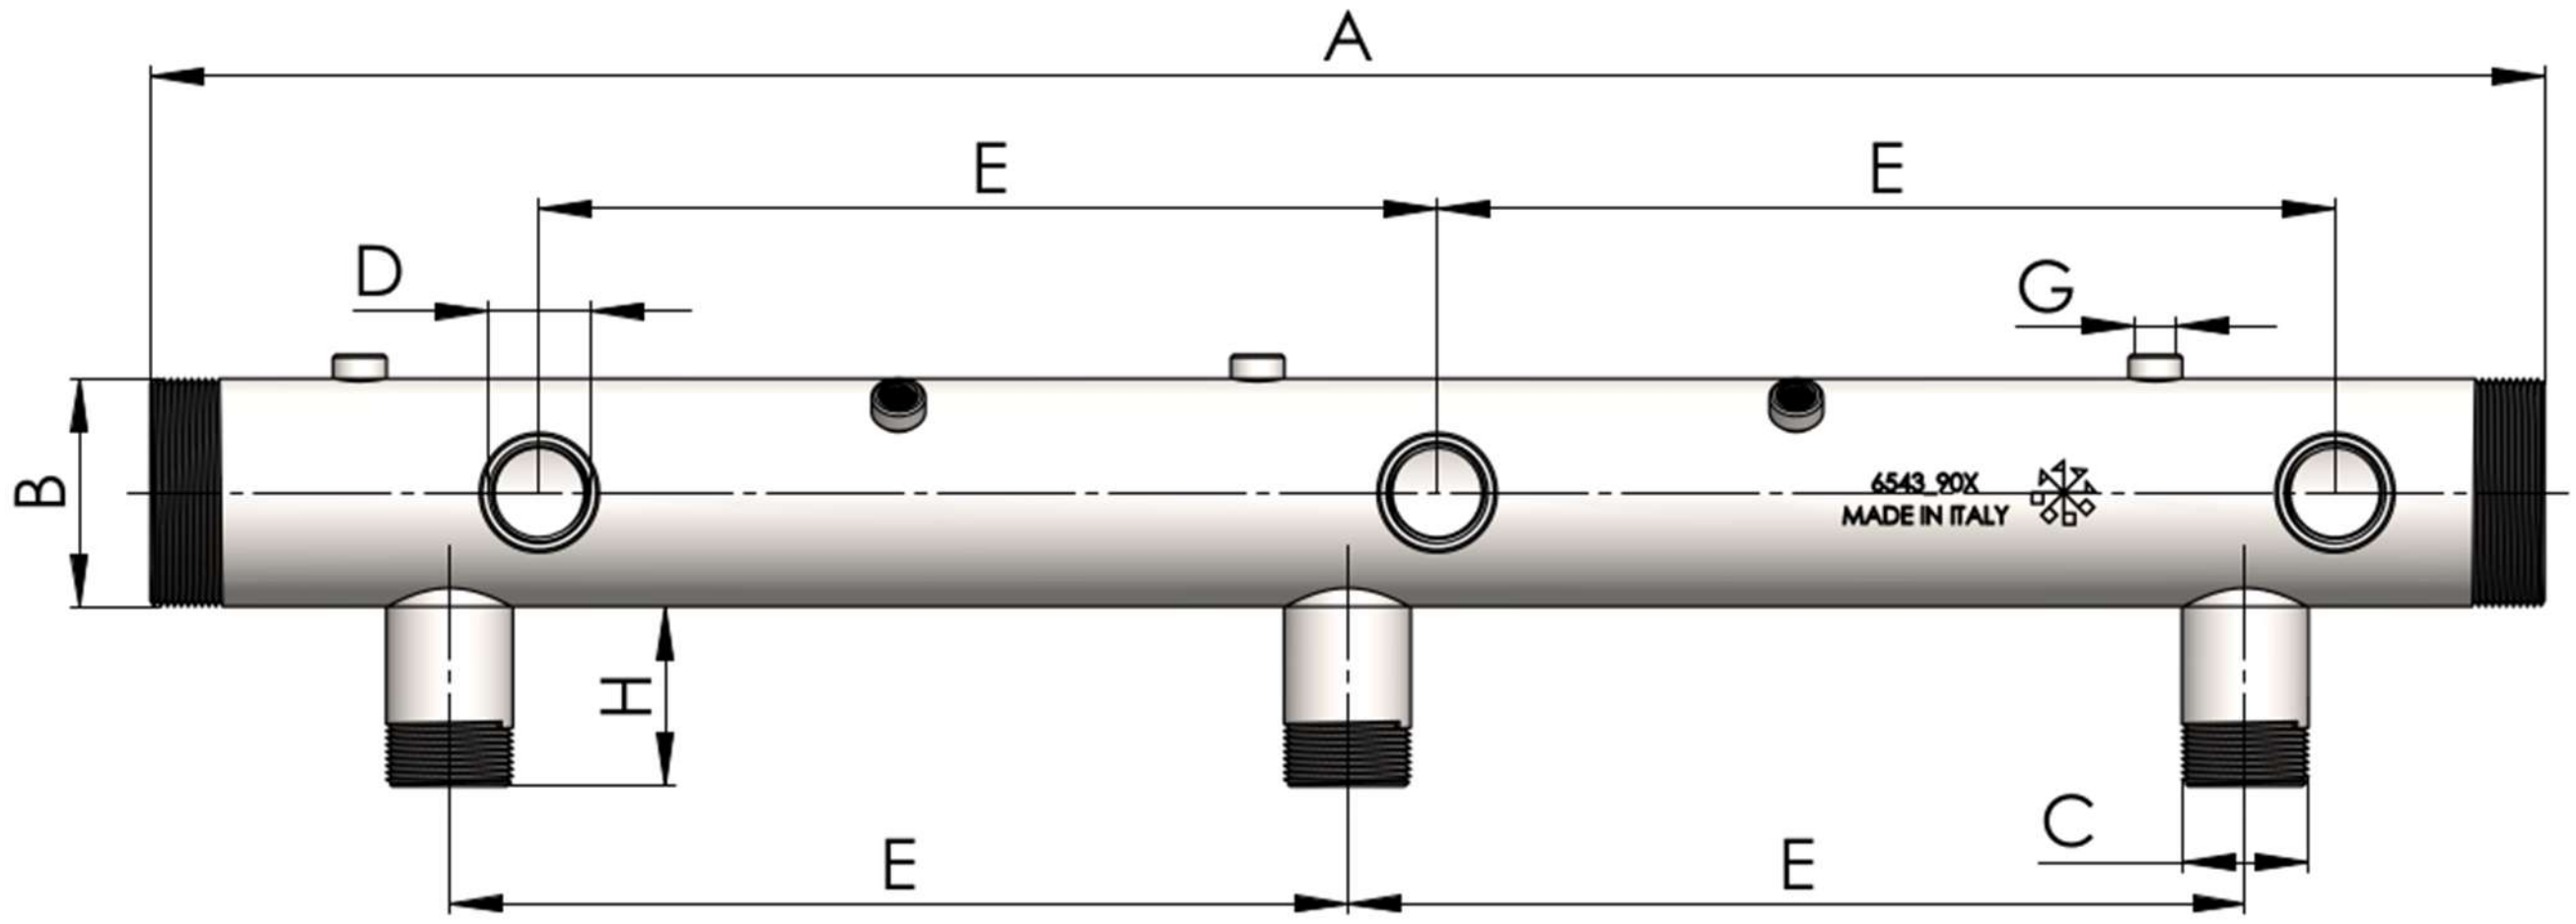

code	A (mm)	B (Ø)	C (G)	D (G)	E (mm)	F (mm)	G (G)	H (mm)	Weight (kg)
6542_90X	800	2”	1”	1”	300	300	1/4”	60	3.80
6540_90X	800	2”	1”1/4	1”	300	300	1/4”	60	3.90
6543_90X	800	2”1/2	1”1/4	1”	300	300	1/4”	60	4.80
6541_90X	800	2”1/2	1”1/2	1”	300	300	1/4”	60	5.00
6544_90X	800	3”	2”	1”	300	300	1/4”	60	6.20
6546_90X	1000	2”1/2	1”1/2	1”	360	300	1/4”	60	6.10
6547_90X	1000	3”	2”	1”	360	300	1/4”	60	7.00

A	Length of manifold in mm
B	Dimension of main pipe, male threaded both sides.
C	Pumps’ connection, male threaded.
D	Pressure vessels’ connection, female sleeve.
E	Distance between pumps.
F	Distance between pressure vessels.
G	Female sleeves for instruments.

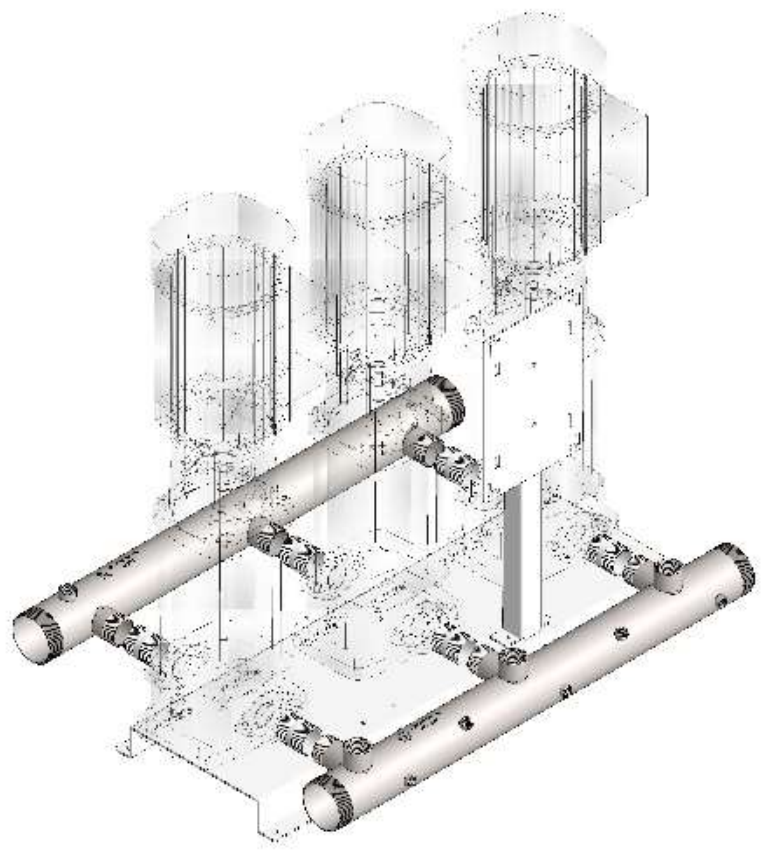

MATERIAL	AISI 304L (1.4306)
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	ELECTROCHEMICAL POLISHING DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

BASE PLATES FOR PUMPS SYSTEMS - AISI 304L

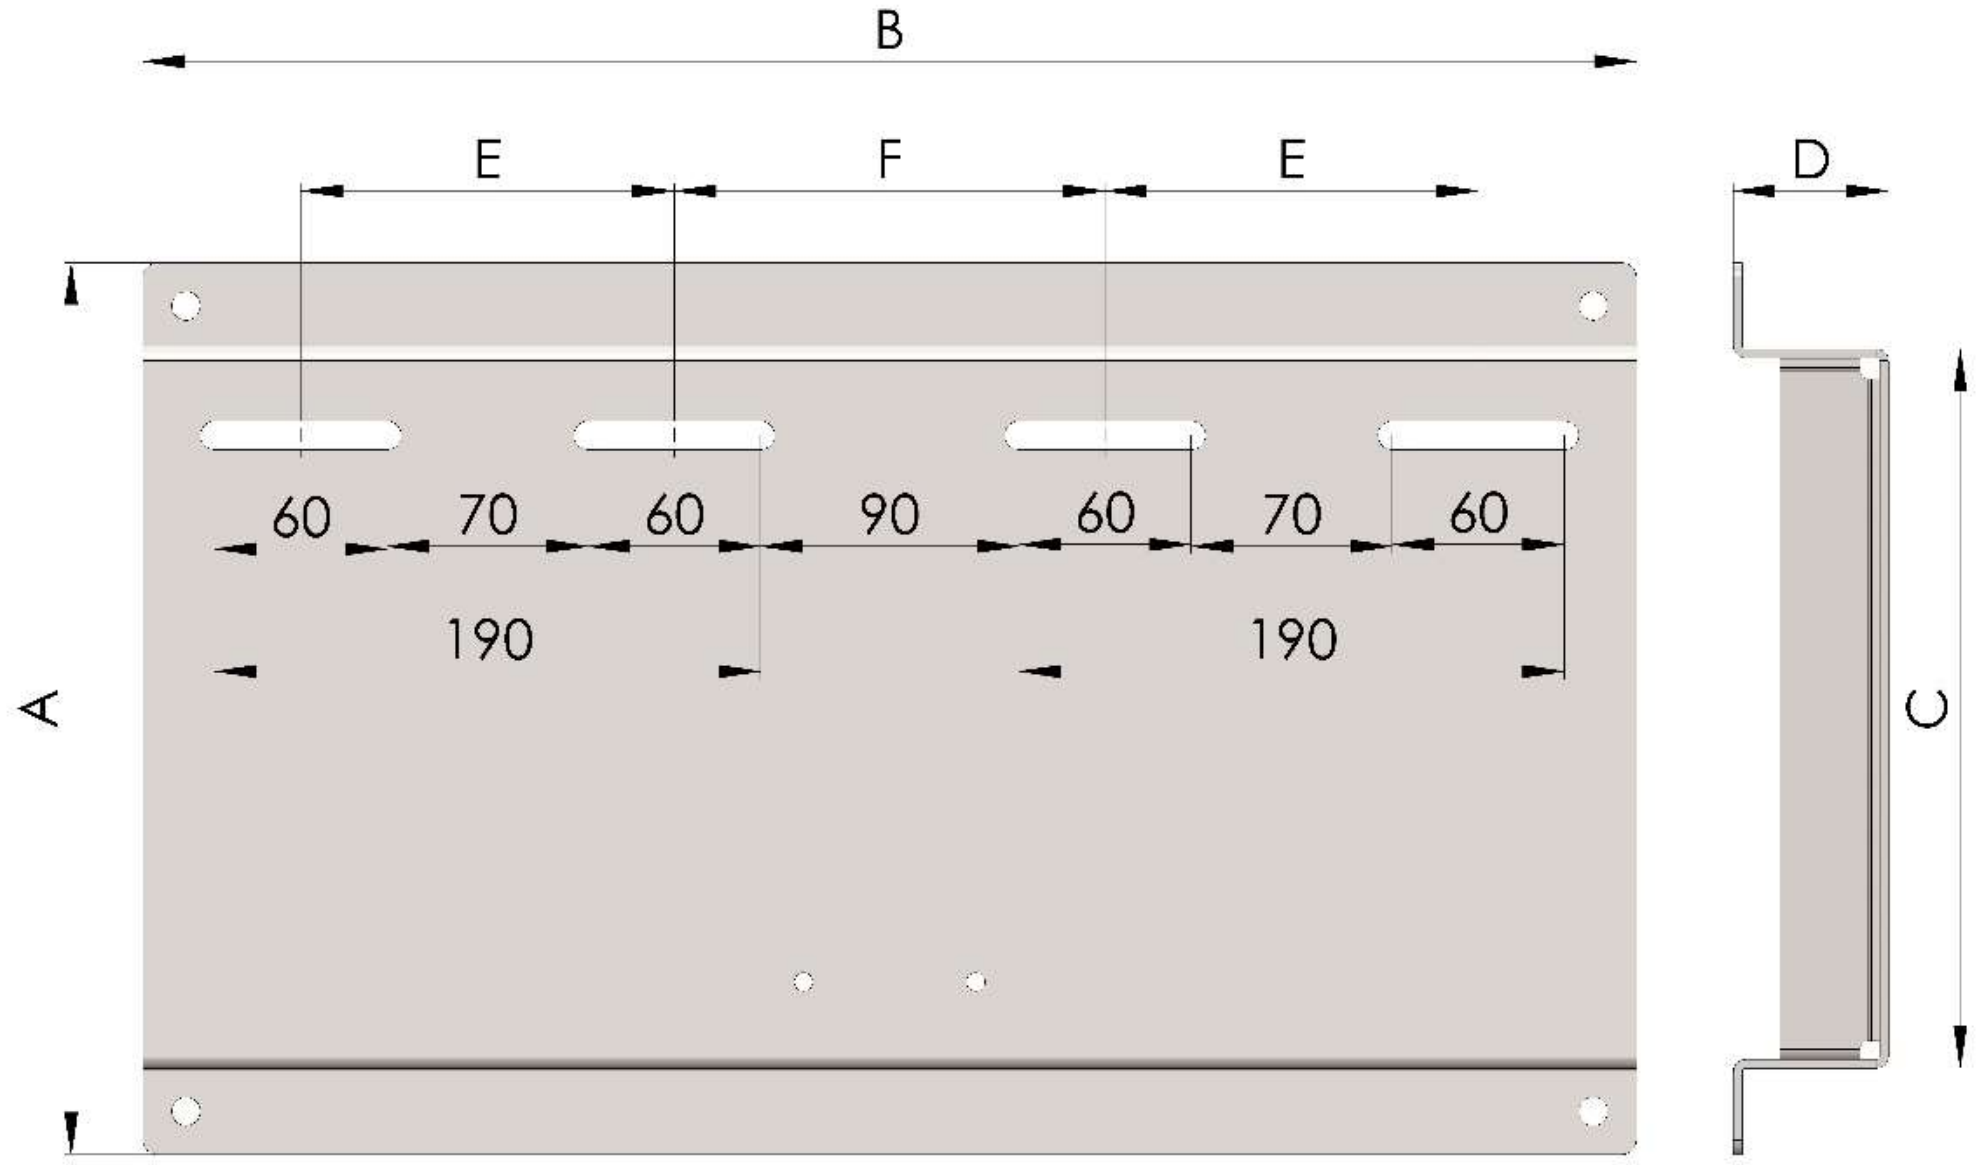

code	Description	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Carrying capacity (KG)
6805X	1 Pump	310	260	250	54	130	50
6800X	2 Pumps	310	520	250	54	130	100
6802X	2 Pumps	350	620	290	54	150	100
6813X	2 Pumps	400	720	340	54	150	100
6803X	3 Pumps	310	800	250	54	130	150
6806X	3 Pumps	400	900	340	54	150	150
6804X	4 Pumps	310	1080	250	54	130	200
6807X	4 Pumps	400	1200	340	54	150	200

A	Width of base plate in mm.
B	Length of base plate in mm.
C	Width of the plane to fix the pump.
D	Hight of the base plate.
E	Center distance to fixing pumps.

MATERIAL	AISI 304L (1.4306)
THICKNESS	3mm

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

STAND AND HOOK FOR ELECTRIC PANEL - AISI 304L

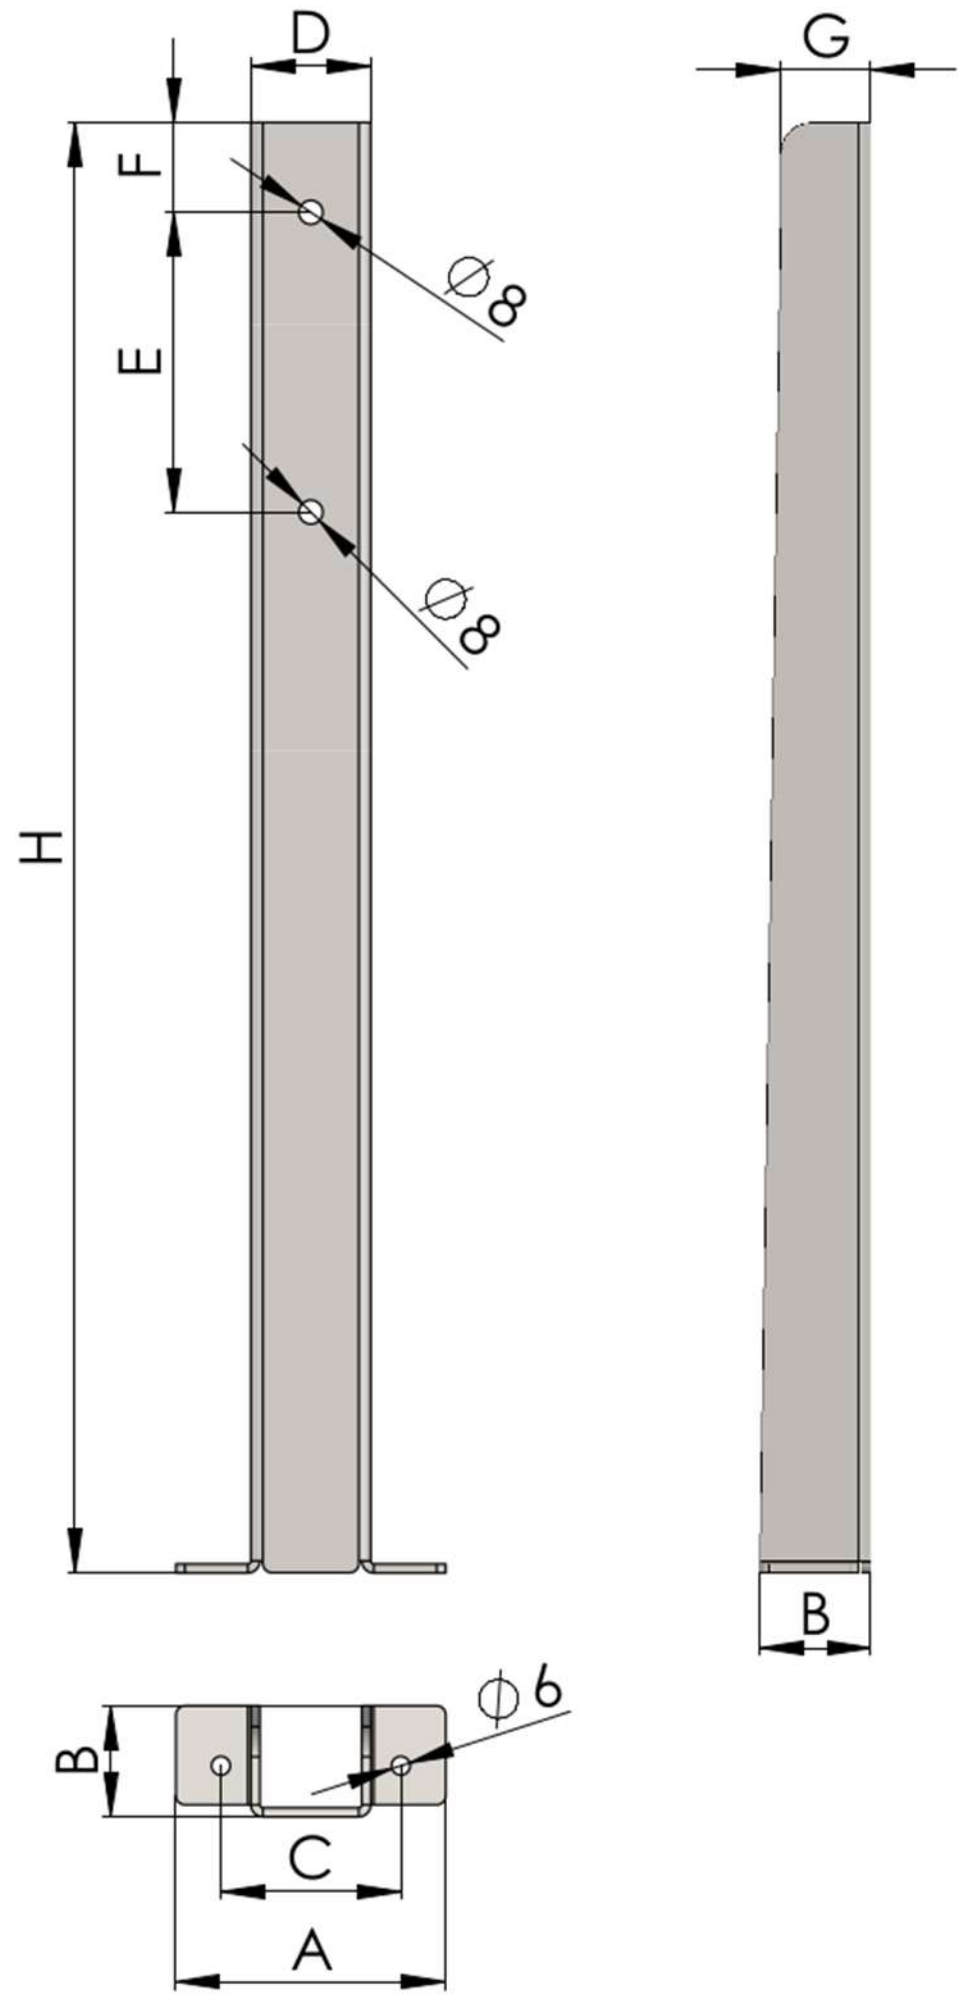



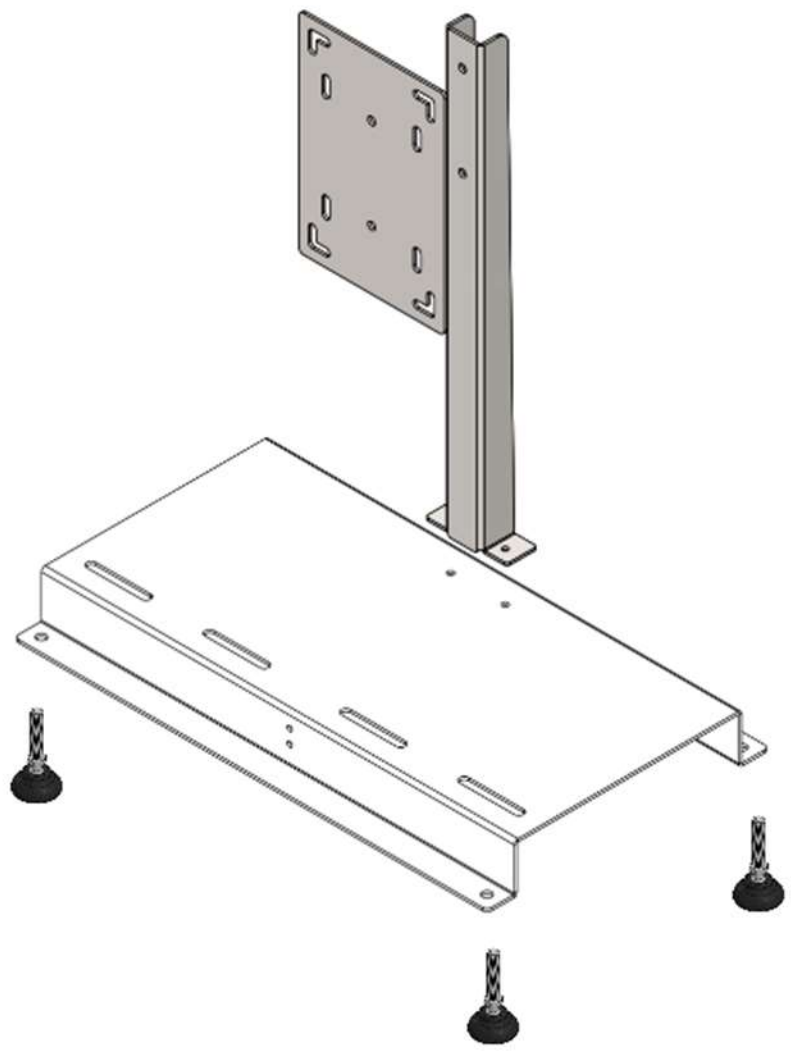

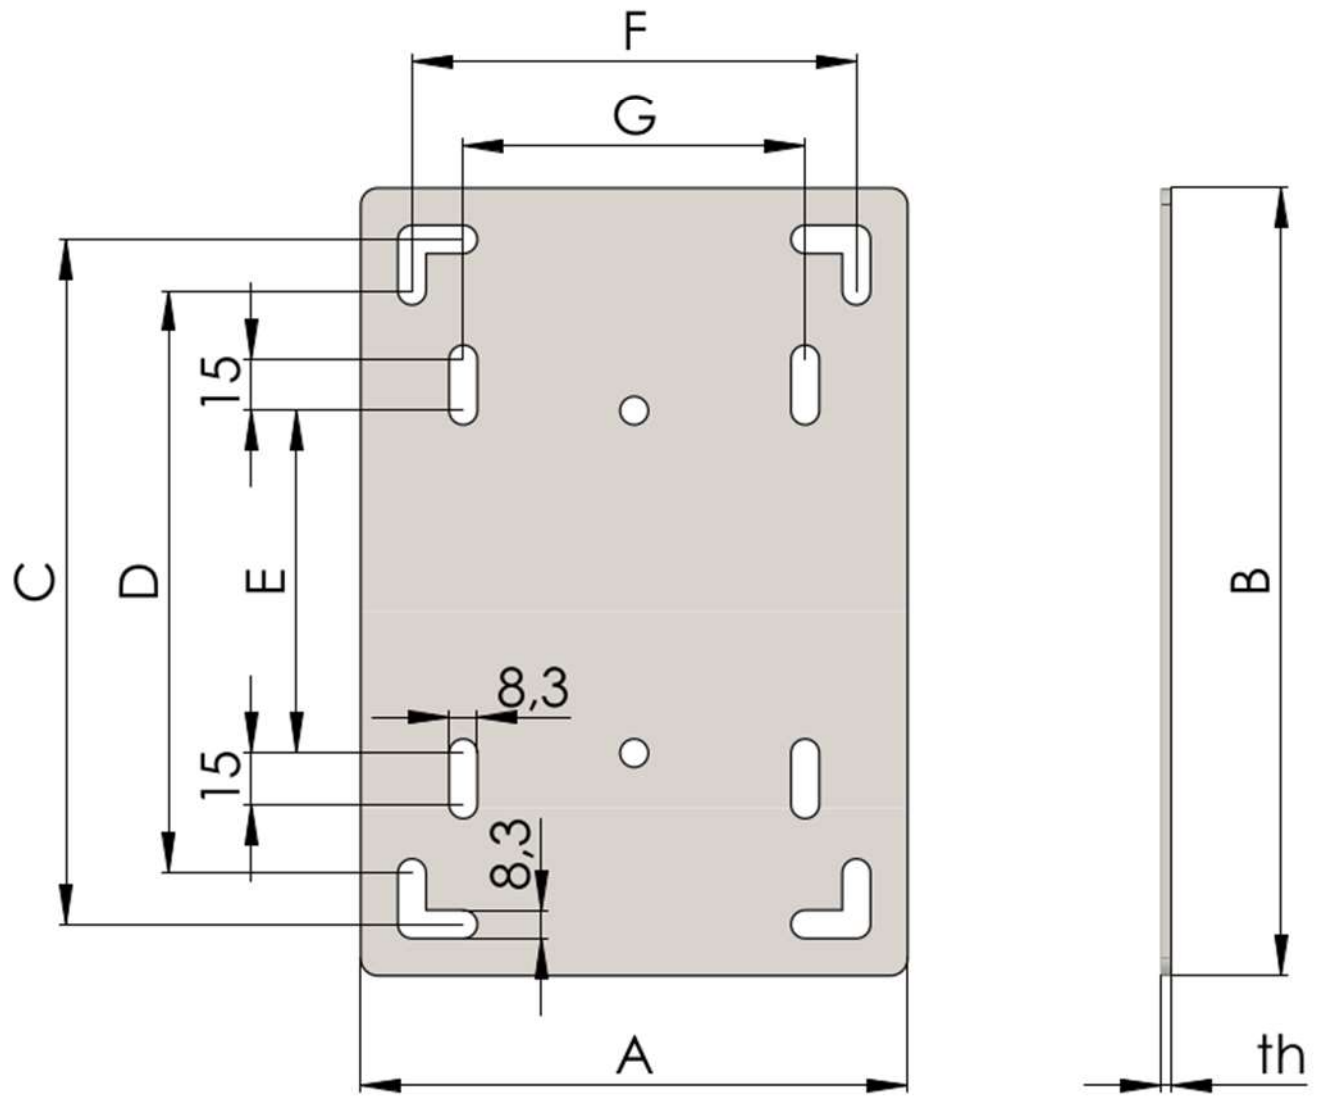

code	Description	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
6801X	Stand for panel	90	37	60	40	100	30	30	484
6808X	Stand for panel	90	37	60	40	100	30	30	800
6814X	Stand for panel	90	37	60	40	100	30	30	1000
6809X	Hook for panel	160	230	200	180	100	130	110	-
6810X	Hook for panel	190	270	250	230	150	170	150	-
6811X	Hook for panel	310	370	350	320	230	260	230	-
6812X	4 feet antivibration	-	-	-	-	-	-	-	-

MATERIAL	AISI 304L (1.4306)
THICKNESS	3mm

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

FEMALE CUPS FOR MANIFOLDS - AISI 316L



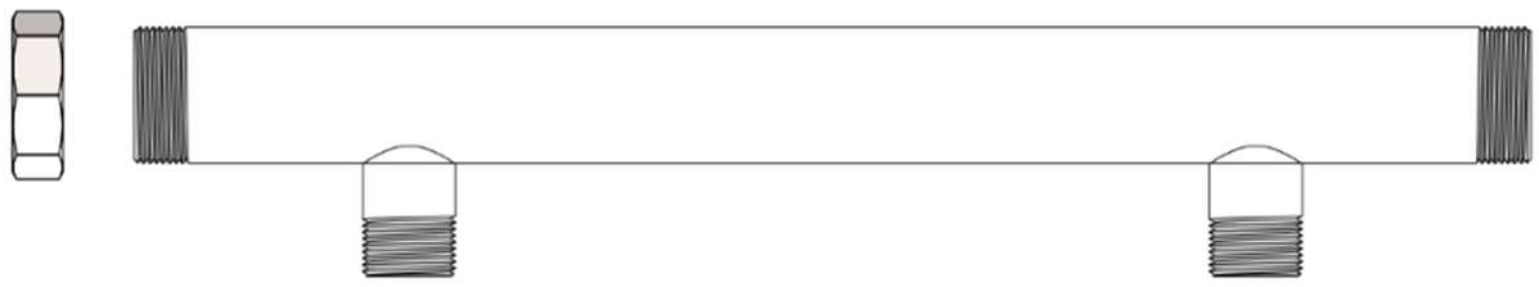

code	Description	Size
6750XX	Cup in stainless steel AISI316L	G1”F
6751XX	Cup in stainless steel AISI316L	G1”1/4F
6752XX	Cup in stainless steel AISI316L	G1”1/2F
6753XX	Cup in stainless steel AISI316L	G2”F
6754XX	Cup in stainless steel AISI316L	G2”1/2F
6755XX	Cup in stainless steel AISI316L	G3”F

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

NIPLES - AISI 304L



code	Description	Size	Lenght
6770X	Niplo stainless steel AISI304L	G1”M	50mm
6771X	Niplo stainless steel AISI304L	G1”1/4M	50mm
6772X	Niplo stainless steel AISI304L	G1”1/2M	70mm
6773X	Niplo stainless steel AISI304L	G2”M	70mm
6774X	Niplo stainless steel AISI304L	G2”1/2M	70mm

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

THREADED REDUCTION - AISI 304L PN16

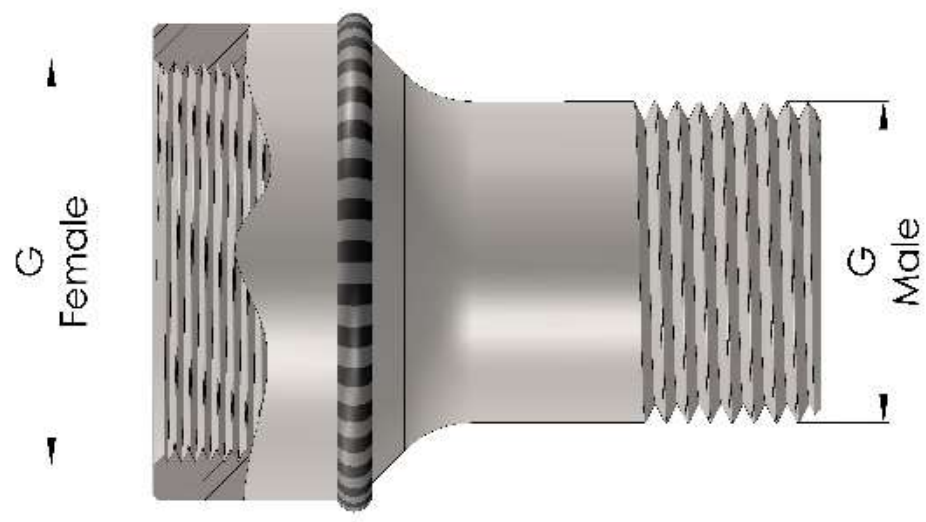

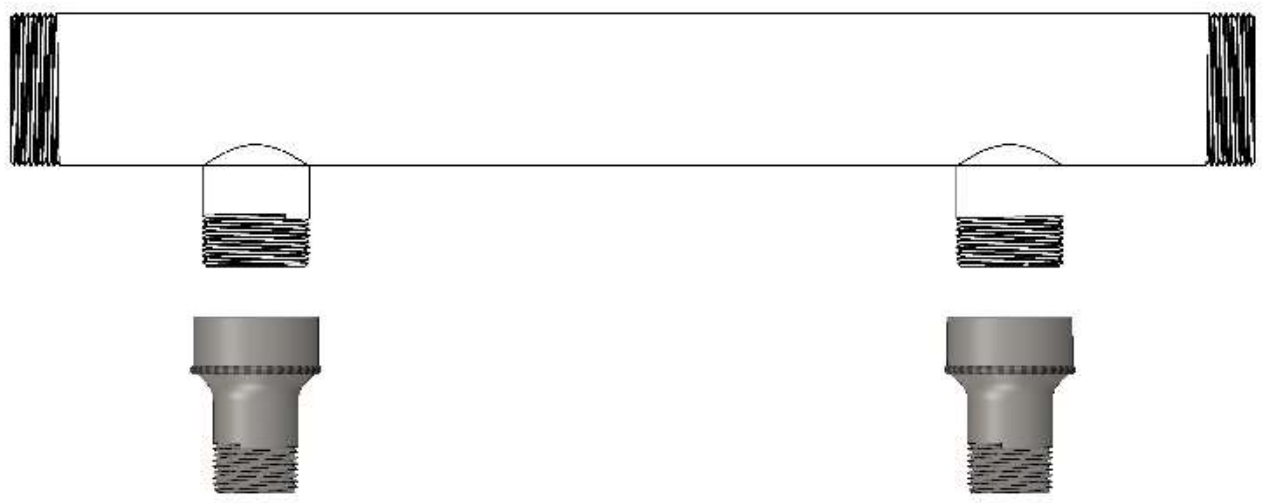

code	Description	Female size	Male size
6775X	Treaded connection stainless steel AISI304	1”1/4	1”
6776X	Treaded connection stainless steel AISI304	1”1/2	1”1/4
6777X	Treaded connection stainless steel AISI304	2”	1”1/2
6778X	Treaded connection stainless steel AISI304	2”1/2	2”

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

BLIND FLANGES - AISI 304L PN16

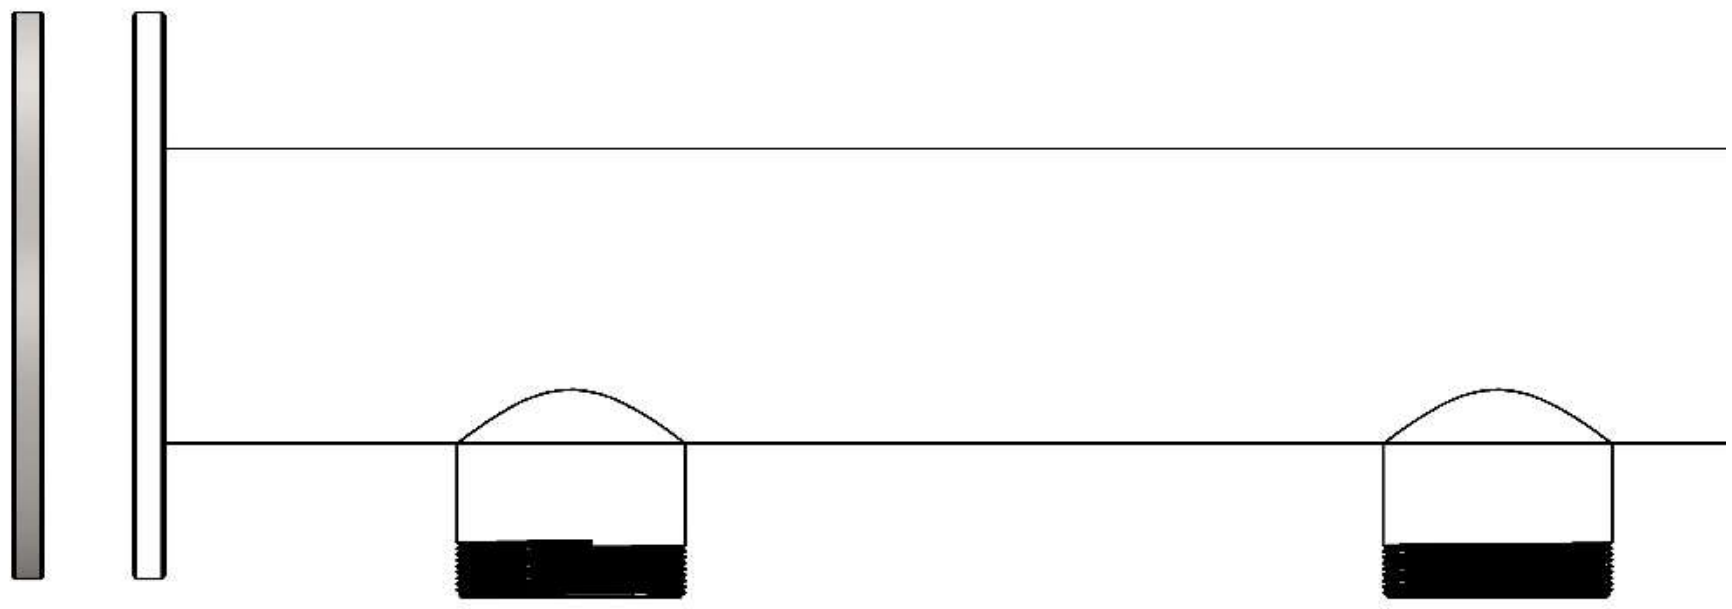

code	Description	Size	rating
6756X	Blind flange stainless steel AISI304L	DN 50	PN16
6757X	Blind flange stainless steel AISI304L	DN 65	PN16
6758X	Blind flange stainless steel AISI304L	DN 80	PN16
6759X	Blind flange stainless steel AISI304L	DN 100	PN16

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

MALE FLANGES PN16- AISI 304L PN16

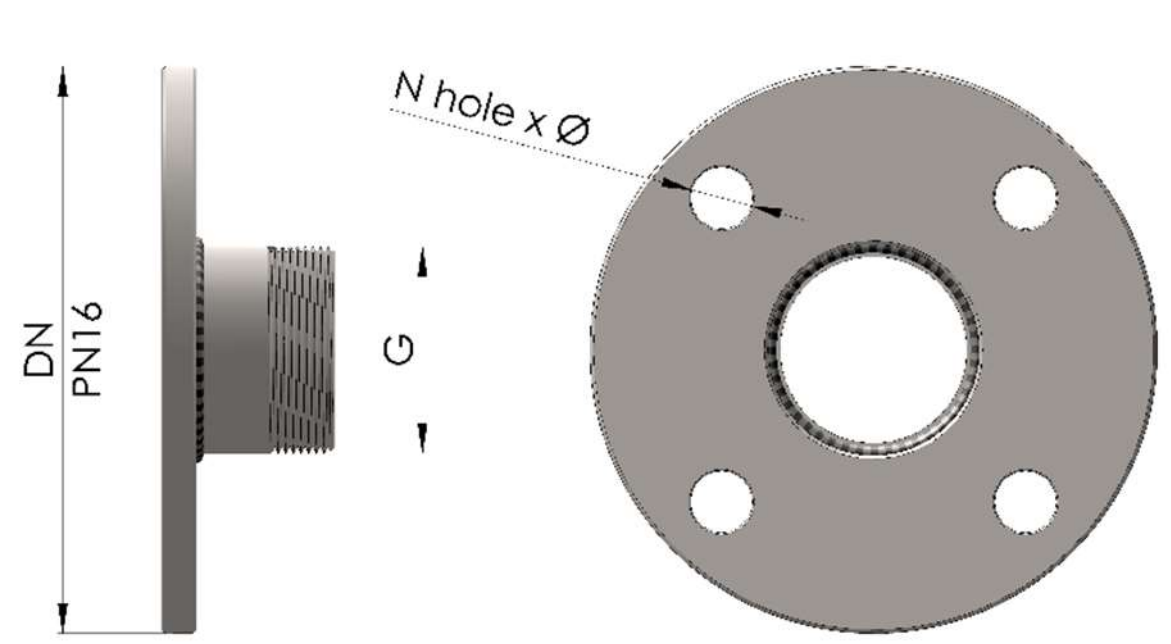

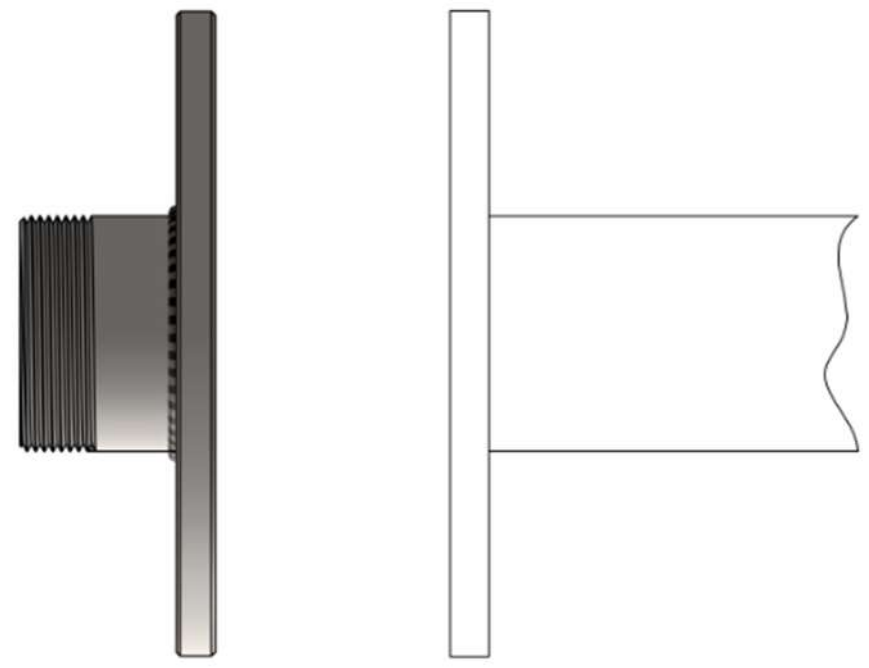

code	Description	Size	rating
6760X	Flange with welded male nipple	DN 25	PN16
6761X	Flange with welded male nipple	DN 32	PN16
6762X	Flange with welded male nipple	DN 40	PN16
6763X	Flange with welded male nipple	DN 50	PN16
6764X	Flange with welded male nipple	DN 65	PN16
6765X	Flange with welded male nipple	DN 80	PN16
6766X	Flange with welded male nipple	DN 100	PN16

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

FEMALE FLANGES - AISI 304L PN16

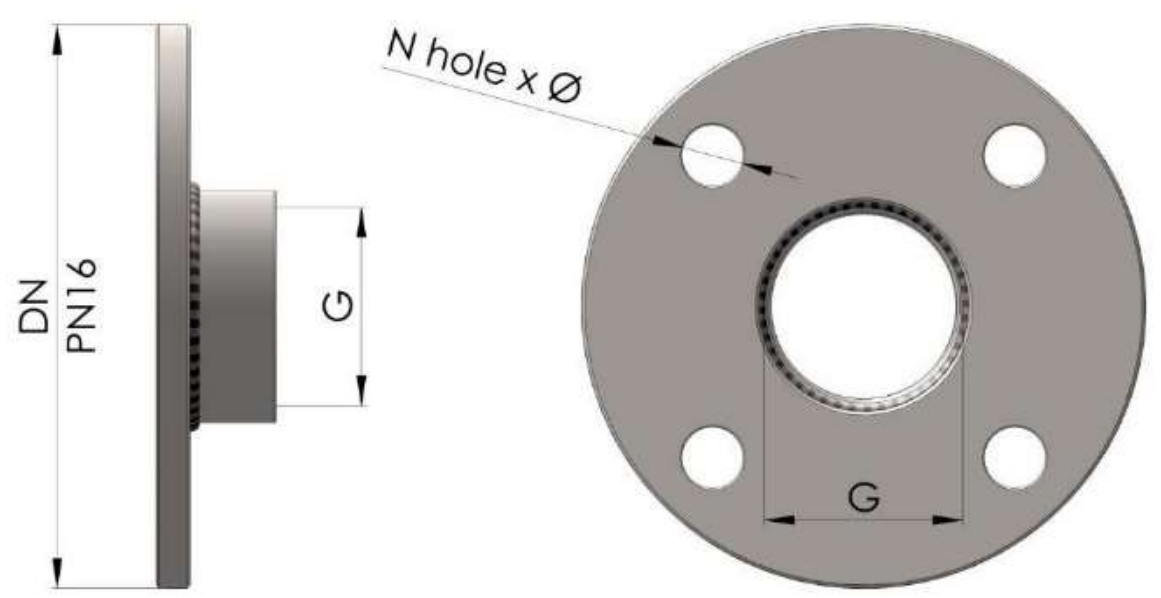



code	Description	Size	rating
6780X	Flange with welded female nipple	DN 25	PN16
6781X	Flange with welded female nipple	DN 32	PN16
6782X	Flange with welded female nipple	DN 40	PN16
6783X	Flange with welded female nipple	DN 50	PN16
6784X	Flange with welded female nipple	DN 65	PN16
6785X	Flange with welded female nipple	DN 80	PN16
6786X	Flange with welded female nipple	DN 100	PN16

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.

Fome is also specialist to customized following customers request of:

- Manifolds for hot water
- Manifolds for cold water
- Manifolds for oil
- Manifolds for gas
- Manifolds for water meters
- Manifolds for gas meters
- Stand for boiler
- Component for boiler cascade
- Rating of the manifolds PN16-PN25-PN40
- Steel and stainless steel AISI304 -AISI316

HOT

COLD

OIL

GAS

General sale conditions

Order: We reserve the right to accept or not the orders received.

Transport: Ex-works, shipment of the goods under customer's responsibility.

Packaging: As above.

Payment: Against documents, if there aren't any particular conditions. For every delayed payment or every other problem, we debit the charges.

Return of Goods: We accept goods back only with our authorization.

Guarantee: The guarantee conditions are in accordance with D.Lsg. n. 24 del 02/02/2002.

Complaint: complains must be received within 5 days from the receipt of the goods.

For any controversy, the competent law court is the one in Conegliano Veneto (TV) Italy.

Delivery: 60 days from the order, before if it is possible.

FO.ME.s.r.l.

Via Cal Resana 15A, 31028 Tezze di Piave, Vazzola, Treviso, Italy.
tel. +39 0438 28446 - fax. +39 0438 28760 - info@fome.it - **www.fome.it**